

Interferometric Water Level Tilt Meter at the Conrad Observatory

Hannu Ruotsalainen, Dóra Bán, Gábor Papp, Roman Leonhardt, Judit Benedek

A prototype one end interferometric water level tilt meter has been operated at Conrad observatory (COBS) since 2014. The instrument records a broad band of geophysical tilt signals with 15 Hz sampling rate e.g. microseisms, free oscillation of the Earth surface and internal structure, Earth tide tilt, ocean loading, atmospheric loading and secular land tilting. Preliminary earth tide analysis based on the recorded tilt data at COBS and comparisons of ocean loading model tilts were already presented in 2015.

A modern 5.5 m long one end Michelson-Gale type water level tilt meter (iWT) prototype was built by the Finnish Geodetic Institute and bought by the Geodetic and Geophysical Institute of the MTA CSFK, Hungary. The instrument was installed in August 2014 at the Conrad Geophysical Observatory in Muggendorf, Thal, Austria. Interferometric fluid level sensing is carried out by the principles described e.g. in Ruotsalainen (2015). This Fizeau type interferometer consists of a HeNe-laser with fiber-optics, a convex-plane lens, a digital CMOS camera and the images of which can be accessed through a remote fiber-optic firewire connection by a computer. Instrument parameters were fitted e.g. to station temperature and local gravity. Fig 1. shows the level interferometer installed at the seismological tunnel of COBS.

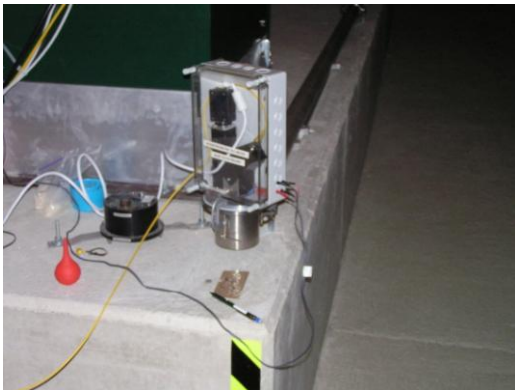


Figure 1: The current setup of iWT on the pier #2. End pot looks to west

Microseisms are often disturbing the recording eventhough the recording station is far from oceans. Global deformation of the rigid Earth by planetary masses (earth tides) causes small bulges to the surface of the earth and due to the rotation of the masses in their positions.

This tidal effect is registered by the tiltmeter and the signal peak to peak has a observational maximum of

about 0.7×250 nanoradians. Fig. 2 shows east-west tidal tilt and microseisms. When artificial jumps and peaks are corrected and microseisms is filtered away, hourly values for earth tide analysis are estimated. Standard tidal analysis is carried out with the Eterna3.4 program developed by H.G. Wenzel (1996). Beyond this e.g. core-mantle resonance can also be investigated. Earth tide observations are also influenced by ocean and atmospheric loading, global models of which can be used to correct observations. After removal of known effects, the tilt residual may indicate local tendencies of tectonic motion. By comparing it with seismological observations, it may reflect pre- and postseismic activity in the area close to the Conrad observatory such as the Mur-Mürz tectonic zone between Austria and Hungary.

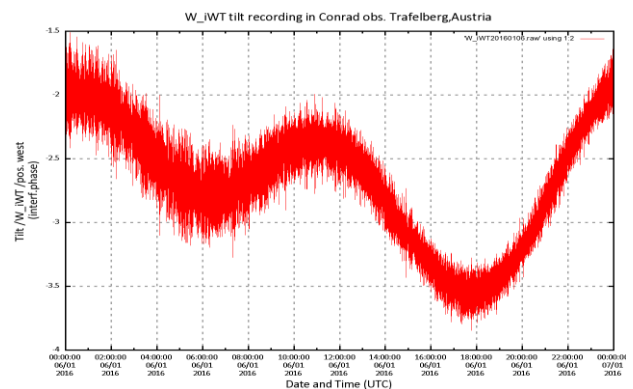


Figure 2: Tilt time series recorded by iWT at COBS, 2016-01-06. Peak to peak tilt amplitude is 125 nanoradian.

References:

Ruotsalainen H., M. Nordman, J. Virtanen and H. Virtanen, 2015. Ocean tide, Baltic Sea and atmospheric loading model tilt comparisons with interferometric geodynamic tilt observation - case study at Lohja2 geodynamic station, southern Finland, *J. Geod. Sci.*, 5:156–162

Wenzel H.-G., 1996. The nanogal software: Earth tide data processing package Eterna 3.30, *Bull. d'Inf. Marées Terr.*, 124:9425 – 9439.

Authors:

H. Ruotsalainen¹, D. Bán², G. Papp², R. Leonhardt³, J. Benedek²

1) Finnish Geospatial Research Institute, Masala, Finland

2) Geodetic and Geophysical Institute, Sopron, Hungary

3) Zentralanstalt für Meteorologie und Geodynamik, Vienna, Austria

Corresponding author:

Hannu Ruotsalainen

Finnish Geospatial Research Institute, National Land Survey of Finland
Geodeetinrinne 2, FI-02430 Masala, Finland

Tel.: +358503608191

e-mail: hannu.ruotsalainen@nls.fi