

## *Corrigendum to*

# “Contaminant transport to public water supply wells via flood water retention areas” published in Nat. Hazards Earth Syst. Sci., 9, 1047–1058, 2009

D. Kühlers<sup>1</sup>, E. Bethge<sup>2</sup>, G. Hillebrand<sup>3</sup>, H. Hollert<sup>4</sup>, M. Fleig<sup>5</sup>, B. Lehmann<sup>3</sup>, D. Maier<sup>6</sup>, M. Maier<sup>1</sup>, U. Mohrlök<sup>2</sup>, and J. Wölz<sup>4</sup>

<sup>1</sup>Stadtwerke Karlsruhe GmbH (SWK), Karlsruhe, Germany

<sup>2</sup>Institute for Hydromechanics (IfH), Karlsruhe, Germany


<sup>3</sup>Institute for Water and River Basin Management (IWG), Karlsruhe, Germany

<sup>4</sup>Institute for Environmental Research (IfU), Aachen, Germany

<sup>5</sup>DVGW-Technologiezentrum Wasser (TZW), Karlsruhe, Germany

<sup>6</sup>Heinrich-Sontheimer-Laboratorium (HSL), Karlsruhe, Germany

Erroneously, Fig. 7 of the published article duplicates Fig. 8, while its caption correctly refers to modelling results before flooding of the retention area. The missing Fig. 7 is given below and should be replaced in the publication.

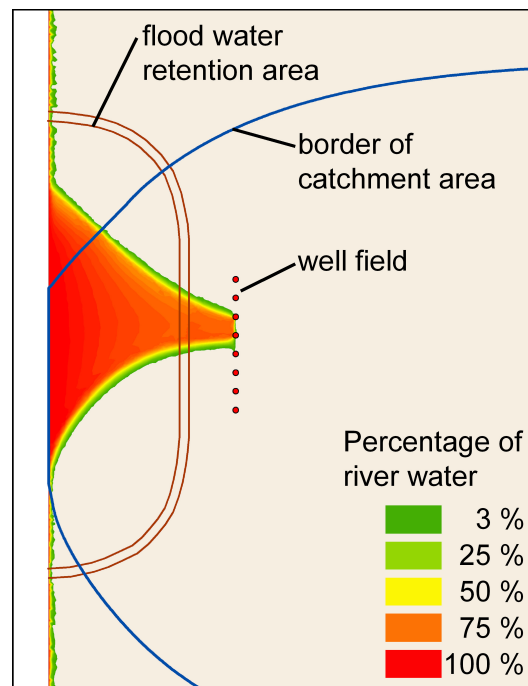

**Fig. 7.** River water in the aquifer before flooding of the retention area.



Correspondence to: D. Kühlers  
(dirk.kuehlers@stadtwerke-  
karlsruhe.de)