



**EBC conditions for
tsunami wave run-up
over sloping
bathymetry**

W. Kristina et al.

Effective coastal boundary conditions for tsunami wave run-up over sloping bathymetry

W. Kristina¹, O. Bokhove^{1,2}, and E. van Groesen^{1,3}

¹Department of Applied Mathematics, University of Twente, Enschede, the Netherlands

²School of Mathematics, University of Leeds, Leeds, UK

³LabMath-Indonesia, Bandung, Indonesia

Received: 10 February 2014 – Accepted: 11 February 2014 – Published: 21 March 2014

Correspondence to: W. Kristina (w.kristina@math.utwente.nl),
O. Bokhove (o.bokhove@leeds.ac.uk), and E. van Groesen (e.w.c.vangroesen@utwente.nl)

Published by Copernicus Publications on behalf of the European Geosciences Union & American Geophysical Union.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

An effective boundary condition (EBC) is introduced as a novel technique to predict tsunami wave run-up along the coast and offshore wave reflections. Numerical modeling of tsunami propagation at the coastal zone has been a daunting task since high accuracy is needed to capture aspects of wave propagation in the more shallow areas. For example, there are complicated interactions between incoming and reflected waves due to the bathymetry and intrinsically nonlinear phenomena of wave propagation. If a fixed wall boundary condition is used at a certain shallow depth contour, the reflection properties can be unrealistic. To alleviate this, we explore a so-called effective boundary condition, developed here in one spatial dimension. From the deep ocean to a seaward boundary, i.e., in the simulation area, we model wave propagation numerically over real bathymetry using either the linear dispersive variational Boussinesq or the shallow water equations. We measure the incoming wave at this seaward boundary, and model the wave dynamics towards the shoreline analytically, based on nonlinear shallow water theory over sloping bathymetry. We calculate the run-up heights at the shore and the reflection caused by the slope. The reflected wave is then influxed back into the simulation area using the EBC. The coupling between the numerical and analytic dynamics in the two areas is handled using variational principles, which leads to (approximate) conservation of the overall energy in both areas. We verify our approach in a series of numerical test cases of increasing complexity, including a case akin to tsunami propagation to the coastline at Aceh, Sumatra, Indonesia.

1 Introduction

Shallow water equations are widely used in the modeling of tsunamis since their wavelengths (typically 200 km) are far greater than the depth of the ocean (typically 2–3 km). Tsunamis also tend to have a small amplitude offshore, which is why they

NPGD

1, 317–369, 2014

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	

generally are less noticeable at sea. Therefore, linear shallow water equations (LSWE) suffice as a simple model of tsunami propagation (Choi et al., 2011; Liu et al., 2009). On the contrary, it turns out that the lack of dispersion is a shortcoming of shallow water modeling when the tsunami reaches the shallower coastal waters on the continental shelf, and thus dispersive models are often required (Madsen et al., 1991; Horrillo et al., 2006). Numerical simulations based on these linear models are desirable because they involve a short amount of computation. However, as the tsunami approaches the shore, shoaling effects cause a decrease of the wavelength and an increase of the amplitude. Here, the nonlinearity starts to play a more important role and thus the nonlinear terms must be included in the model. To capture these shoaling effects in more detail, a smaller grid size will be needed. Consequently, longer computational times are required.

Some numerical models of tsunamis use nested methods with different mesh resolution to preserve the accuracy of the solution near the coast area (Titov et al., 2011; Wei et al., 2008). While other models employ an impenetrable vertical wall at a certain depth contour as the boundary condition. Obviously, the reflection properties of such a boundary condition can be unrealistic. We therefore wish to alleviate this shortcoming by an investigation of a so-called effective boundary condition (EBC) (Kristina et al., 2012), and also take into account the run-up case. In one horizontal spatial dimension, an outline of the desired mathematical modeling is sketched in Fig. 1. In the deep ocean for $x \in [B, L]$ with horizontal coordinate x and seaward boundary point $x = B$, denoted as the *simulation area*, we model the wave propagation numerically using linear model. In the coastal zone for $x \in [x_s(t), B]$ with shoreline position $x_s(t) < B$, denoted as the *model area*, we model the wave propagation analytically using nonlinear model by approximating the bathymetry as a planar beach. We calculate the run-up heights at the shore and the reflection caused by the slope. The reflected wave is then influxed back into the simulation area using the EBC. The coupling between the numerical and analytic dynamics in the two areas is handled using variational principles, which leads to (approximate) conservation of the overall



energy in both areas. Following Kristina et al. (2012), an observation and influx operator are defined at $x = B$ to measure the incoming wave signal and influx the reflected wave, respectively.

The shoreline position and wave reflection in the model area (sloping region) are determined using an analytical solution of the nonlinear shallow water equations (NSWE) following the approach of Antunono and Brocchini (2010) for unbroken waves. The novelty of our approach is the utilization of an observation operator at the boundary $x = B$ to calculate the incoming wave elevation towards the shore from the numerical solution of the LSWE in the simulation area. For any given wave profile and bathymetry in the simulation area, the numerical solution can be calculated and the signal arriving at $x = B$ can be observed. Afterwards, the data are used to calculate the analytical solution of the NSWE in the onshore region and the reflected waves. This is an enhancement compared to the work in Antunono and Brocchini (2010) and Madsen and Schaffer (2010), in which the solution of the KdV equation is used for a wave traveling over flat bathymetry, to define the incoming wave signal at $x = B$.

A rapid method to estimate tsunami run-up heights is also suggested by Choi et al. (2011, 2012) by imposing a hard-wall boundary condition at $x = B$. Giving the water wave oscillations at this hard wall at $x = B$, the maximum run-up height of tsunami waves at the coast is subsequently calculated in separation by employing a linear approach. It is claimed that the linear and nonlinear theories predict the same maximal values for the run-up height if the incident wave is determined far from the shore (Synolakis, 1987). In contrast, Li and Raichlen (2001) shows that there is a difference in the maximum run-up prediction between linear and nonlinear theory. In addition to calculating only the maximum run-up height as in Choi's method, our EBC also includes the calculation of reflected waves. Thus, the point-wise wave height in the whole domain (offshore and onshore area) is predicted accurately. For the inundation prediction, we have verified that the method introduced by Choi et al. (2011, 2012) performs as well as our EBC method, while the reflection wave comparisons show larger discrepancies due to the usage of hard-wall boundary condition. The

**EBC conditions for
tsunami wave run-up
over sloping
bathymetry**

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



interaction between incoming and reflected waves needs to be predicted accurately since subsequent waves may cause danger at later times.

A determination of the location of the seaward boundary point $x = B$ is another issue that must be addressed. Choi et al. (2011) put the impermeable boundary conditions at a 5–10 m depth contour. In comparison, Didenkulova and Pelinovsky (2008) show that their run-up formula for symmetric waves gives optimal results when the incoming wave signal is measured at a depth that is two-thirds of the maximum wave height. We determine the location of this seaward boundary as the point before the nonlinearity effect arises, and examine the dispersion effect at that point as well. Considering the simple KdV equation (Mei, 1989), the measures of nonlinearity and dispersion are given by the ratios $\delta = A/h$ and $\mu^2 = (kh)^2$, for the wave amplitude A , water depth h , and wavenumber k . Provided with the information of the initial wave profile, we can calculate the amplification of the amplitude and the decrease of the wavelength in a linear approach, and thereafter estimate the location of the EBC point.

The numerical solution in the simulation area is based on a variational finite element method (FEM). In order to verify the EBC implementation that employs analytical solution, we also numerically simulate the NSW in the model area using a finite volume method (FVM). Both cases are coupled to the simulation area to compare the results. Our EBC in this article will be derived in one spatial dimension for reasons of simplicity and clarity of exposure. In Sect. 2, we introduce the linear variational Boussinesq model (LVBM) and shallow water equations (SWE), both linear and nonlinear, from their variational principles. The coupling conditions required at the seaward boundary point are also derived here. The solution of the NSW using a method of characteristics is shown in Sect. 3, which includes the solution of the shoreline position. In Sect. 4, the effective boundary condition is derived required to pinpoint the coupling conditions derived between the finite element simulation area and the model area. Numerical verification is shown in Sect. 5, and we conclude in Sect. 6.

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



2 Water wave models

Our primary goal is to model the water wave motion to the shore analytically, instead of resolving the motion in these shallow regions numerically. We therefore introduce an artificial, open boundary at some depth and wish to determine an effective boundary condition at this internal boundary. To wit, for motion in a vertical plane normal to the shore with one horizontal dimension, this artificial boundary is placed at $x = B$ while the real (time-dependent) boundary lies at $x = x_s(t)$ with $x_s(t) < B$. For example, land starts where the total water depth $h = h(x, t) = 0$ at $x = 0$. This water line is time dependent as the wave can move up and down the beach.

We will restrict attention to the dynamics in a vertical plane with horizontal and vertical coordinates x and z , respectively. Nonlinear, potential flow water waves are succinctly described by variational principles of Luke (1967) and Miles (1977) as follows

$$0 = \delta \int_0^T \mathcal{L}[\phi, \Phi, \eta, x_s] dt = \delta \int_0^T \int_{x_s}^L \left(\phi \partial_t \eta - \frac{1}{2} g \left((h + b)^2 - b^2 \right) - \int_{-h_b}^{\eta} \frac{1}{2} |\nabla \Phi|^2 dz \right) dx dt \quad (1)$$

with velocity potential $\Phi = \Phi(x, z, t)$, surface potential $\phi(x, t) = \Phi(x, z = \eta, t)$, where $\eta = h - h_b$ is the wave elevation and $h = h(x, t)$ the total water depth above the bathymetry $b = -h_b(x)$ with $h_b(x)$ the rest depth. Time runs from $t \in [0, T]$; partial derivatives are denoted by ∂_t et cetera, the gradient in the vertical plane as $\nabla = (\partial_x, \partial_z)^T$ and the acceleration of gravity as g .

The approximation for the velocity potential Φ in Eq. (1) can be of various kind, but all are based on the idea to restrict the class of wave motions to a class that contains the wave motions one is interested in (van Groesen, 2006; Cotter and Bokhove, 2010; Gagarina et al., 2013).

Following Klopman et al. (2010), we approximate the velocity potential as follows

$$\Phi(x, z, t) = \phi(x, t) + F(z)\psi(x, t) \quad (2)$$

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



for a function $F = F(z)$. Its suitability is determined by insisting that $F(\eta) = 0$ such that ϕ is the potential at the location $z = \eta$ of the free surface and satisfies the slip flow condition at the bottom boundary $z + h_b(x) = 0$. The latter kinematic condition yields $\partial_z \Phi + \partial_x \Phi \partial_x h_b = 0$ at $z = -h_b(x)$. For slowly varying bottom topography, this condition is approximated by

$$(\partial_z \Phi)_{z=-h_b(x)} = F'(-h_b) \psi = 0.$$

Substitution of Eq. (2) into Eq. (1) yields the variational principle for Boussinesq equations as follows (Klopman et al., 2010)

$$0 = \delta \int_0^T \mathcal{L}[\phi, \psi, \eta, x_s] dt = \delta \int_0^T \int_0^L \left(\phi \partial_t \eta - \frac{1}{2} g \left((h+b)^2 - b^2 \right) - \frac{1}{2} (\eta + h_b) |\partial_x \phi|^2 - \check{\beta} \partial_x \psi \partial_x \phi - \frac{1}{2} \check{\alpha} |\partial_x \psi|^2 - \frac{1}{2} \check{\gamma} \psi^2 \right) dx dt, \quad (3)$$

where functions $\check{\beta}(x)$, $\check{\alpha}(x)$, and $\check{\gamma}(x)$ are given by

$$\check{\beta}(x) = \int_{-h_b}^{\eta} F dz, \quad \check{\alpha}(x) = \int_{-h_b}^{\eta} F^2 dz, \quad \check{\gamma}(x) = \int_{-h_b}^{\eta} (F')^2 dz. \quad (4)$$

The shallow water equations (SWE) are derived with the assumption that the wavelengths of the waves are much larger than the depth of the fluid layer so that the vertical variations are small and will be ignored. In this case, there is no dispersive effect. The velocity potential is approximated over depth by its value at the surface, such that $F(z) = 0$. Hence, when $\check{\beta} = \check{\alpha} = \check{\gamma} = 0$ in Eq. (3), the nonlinear shallow water equations are obtained as limiting system.

We a priori divide the domain into two intervals, $x \in [B, L]$, where we model the wave propagation linearly, and $x \in [x_s(t), B]$, where we keep the nonlinearity. Hereafter, we

write $\check{\phi}$ and $\check{\eta}$ for the linear variables and also the definitions of $\check{\beta}$, $\check{\alpha}$, and $\check{\gamma}$ simplify accordingly. Thus, our variational principle becomes

$$0 = \delta \int_0^T \mathcal{L} [\check{\phi}, \check{\psi}, \check{\eta}, \phi, \eta, x_s] dt$$

$$= \delta \int_0^T \left[\int_B^L \left(\check{\phi} \partial_t \check{\eta} - \frac{1}{2} g \check{\eta}^2 - \frac{1}{2} h_b |\partial_x \check{\phi}|^2 - \check{\beta} \partial_x \check{\psi} \partial_x \check{\phi} - \frac{1}{2} \check{\alpha} |\partial_x \check{\psi}|^2 - \frac{1}{2} \check{\gamma} \check{\psi}^2 \right) dx \right. \quad (5a)$$

$$\left. + \int_{x_s}^B \left(\phi \partial_t \eta - \frac{1}{2} g \left((h+b)^2 - b^2 \right) - \frac{1}{2} (\eta + h_b) |\partial_x \phi|^2 \right) dx \right] dt. \quad (5b)$$

We choose a parabolic profile function $F(z; h_b) = 2z/h_b + z^2/h_b^2$, in which the x dependence is considered to be parametric when total water depth h is sufficiently slowly varying. Consequently,

$$\check{\alpha} = \check{\alpha}(x) = \int_{-h_b}^0 F^2 dz = \frac{8}{15} h_b,$$

$$\check{\beta} = \check{\beta}(x) = \int_{-h_b}^0 F dz = -\frac{2}{3} h_b,$$

$$\check{\gamma} = \check{\gamma}(x) = \int_{-h_b}^0 (F')^2 dz = \frac{4}{3h_b}. \quad (6)$$

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



The variations in Eq. (5) yield

$$0 = \lim_{\epsilon \rightarrow 0} \frac{1}{\epsilon} \int_0^T \mathcal{L} \left[\check{\phi} + \epsilon \delta \check{\phi}, \check{\psi} + \epsilon \delta \check{\psi}, \check{\eta} + \epsilon \delta \check{\eta}, \phi + \epsilon \delta \phi, \eta + \epsilon \delta \eta, x_s + \epsilon \delta x_s \right] - \mathcal{L} \left[\check{\phi}, \check{\psi}, \check{\eta}, \phi, \eta, x_s \right] dt \quad (7a)$$

$$= \int_0^T \left[\int_B \left((\partial_t \check{\eta} + \partial_x (h_b \partial_x \check{\phi}) + \partial_x (\check{\beta} \partial_x \check{\psi})) \delta \check{\phi} - (\partial_t \check{\phi} + g \check{\eta}) \delta \check{\eta} + (\partial_x (\check{\alpha} \partial_x \check{\psi}) + \partial_x (\check{\beta} \partial_x \check{\phi}) - \check{\gamma} \check{\psi}) \delta \check{\psi} \right) dx + \underbrace{(h_b \partial_x \check{\phi} + \check{\beta} \partial_x \check{\psi}) \delta \check{\phi}}_{|x=B} + \underbrace{(\check{\alpha} \partial_x \check{\psi} + \check{\beta} \partial_x \check{\phi}) \delta \check{\psi}}_{|x=B} \right] + \int_{x_s}^B \left((\partial_t \eta + \partial_x ((\eta + h_b) \partial_x \phi)) \delta \phi - \left(\partial_t \phi + g \eta + \frac{1}{2} \partial_x^2 \phi \right) \delta \eta \right) dx - \underbrace{(\eta + h_b) \partial_x \phi \delta \phi}_{|x=B} + \underbrace{(\phi \delta \eta)}_{|x=x_s} \frac{dx_s}{dt} - (\phi \partial_t \eta)_{|x=x_s} \delta x_s \Big] dt, \quad (7b)$$

10 where we used endpoint conditions $\delta \eta(0) = \delta \eta(T) = 0$, no-normal through flow conditions at $x = L$ and $h(x_s(t), t) = 0$. Since the variations are arbitrary, the linear equations emerging from Eq. (7b) for $x \in [B, L]$ are as follows

$$\partial_t \check{\phi} + g \check{\eta} = 0, \quad (8a)$$

$$\partial_t \check{\eta} + \partial_x (h_b \partial_x \check{\phi}) + \partial_x (\check{\beta} \partial_x \check{\psi}) = 0 \quad (8b)$$

$$15 \partial_x (\check{\alpha} \partial_x \check{\psi}) + \partial_x (\check{\beta} \partial_x \check{\phi}) - \check{\gamma} \check{\psi} = 0 \quad (8c)$$

and for $x \in [x_s(t), B]$, we get the nonlinear equations of motion

$$\partial_t \phi + g\eta + \frac{1}{2} \partial_x^2 \phi = 0, \quad (9a)$$

$$\partial_t \eta + \partial_x ((\eta + h_b) \partial_x \phi) = 0. \quad (9b)$$

5 The last two terms in Eq. (7b) are the boundary terms at $x = x_s$. They can be rewritten as follows

$$\int_0^T \left[(\phi \delta \eta)|_{x=x_s} \frac{dx_s}{dt} - (\phi \partial_t \eta)|_{x=x_s} \delta x_s \right] dt = \int_0^T \left[\left(-\phi \partial_x (\eta + h_b) \frac{dx_s}{dt} - \phi \partial_t \eta \right) \delta x_s \right]_{x=x_s} dt, \quad (10)$$

10 since the total depth $h(x_s, t) = \eta(x_s, t) + h_b(x_s) = 0$ at the shoreline boundary. Therefore, we have the relation $0 = \delta h(x_s, t) = \delta h + \partial_x h \delta x_s = \delta \eta + \partial_x (\eta + h_b) \delta x_s$. Substituting Eq. (9b) into (10), the boundary condition at the shoreline is

$$\frac{dx_s}{dt} = \partial_x \phi \text{ at } x = x_s(t), \quad (11)$$

15 i.e., the velocity of the shoreline equals the horizontal velocity of the fluid particle. The underlined terms in Eq. (7b) apply at the seaward point, where we want to derive the coupling of effective boundary conditions. To derive the condition for the linear model, the goal is to write these terms using the variations $\delta \check{\phi}$ and $\delta \check{\psi}$. Because the depth-averaged shallow water equations are considered, we have

$$\phi(x, t) = \bar{\Phi}(x, t) = \frac{1}{h_b} \int_{-h_b}^0 \Phi(x, z, t) dz = \check{\phi} + \frac{\check{\beta}}{h_b} \check{\psi}, \quad (12)$$

20 where the last equality arises from approximation (2) for the velocity potential. Thus, the variation of $\delta \phi$ becomes

$$\delta \phi = \delta \check{\phi} + \frac{\check{\beta}}{h_b} \delta \check{\psi}.$$

Substituting this into Eq. (7b), we get the coupling condition at $x = B$ for the linear model as follows

$$h_b \partial_x \check{\phi} + \check{\beta} \partial_x \check{\psi} = h \partial_x \phi \quad (13a)$$

$$\check{\alpha} \partial_x \check{\psi} + \check{\beta} \partial_x \check{\phi} = \frac{\check{\beta}}{h_b} h \partial_x \phi \quad (13b)$$

To derive the condition for the nonlinear shallow water model, we use the approximation for the velocity potential (2) again. Since $F(z = \eta) = 0$ at the surface we have $\phi = \check{\phi}$ and thus $\delta\phi = \delta\check{\phi}$. From Eq. (7b), the coupling condition for nonlinear model is given by

$$h \partial_x \phi = h_b \partial_x \check{\phi} + \check{\beta} \partial_x \check{\psi}. \quad (14)$$

The coupling conditions (13)–(14) will be used to transfer the information between the two domains. In the simulation area, the boundary condition is used to influx the reflected wave in a FEM simulation, while in the model area this coupling condition is used in the analytical solution of the finite volume simulation (FVM). The finite volume implementation is shown in the Appendix A.

3 Nonlinear shallow water equations

3.1 Characteristic form

We will start with the NSWE in the shore region. Using $\eta = -h_b + h$ and velocity $u = \partial_x \phi$, we may rewrite Eq. (9) as follows (starred variables are used here for later convenience)

$$\partial_{t^*} h^* + \partial_{x^*} (h^* u^*) = 0 \quad (15a)$$

$$\partial_{t^*} u^* + u^* \partial_{x^*} u^* = -g^* \partial_{x^*} (-h_b^* + h^*). \quad (15b)$$

The dimensionless form of Eq. (15) for a still water depth $h_{b*} = \gamma^* x^*$ (where $\gamma^* = \tan \theta$ is the beach slope) is obtained by using the scaling factors (Brocchini and Peregrine, 1996):

$$h = \frac{h^*}{h_0}, u = \frac{u^*}{u_0}, x = \frac{x^*}{l_0}, t = \frac{t^*}{t_0}, \quad (16)$$

in which h_0 is the still water depth at the seaward boundary and u_0 , l_0 , and t_0 are defined below as

$$u_0 = \sqrt{\frac{g^* h_0}{g}}, l_0 = \frac{h_0 \gamma}{\gamma^*}, t_0 = \frac{\gamma}{\gamma^*} \sqrt{\frac{g h_0}{g^*}}, \quad (17)$$

where $g = 1$ and $\gamma = 1$ are dimensionless gravity acceleration and beach slope, respectively. The NSWE in dimensionless form are then given by

$$\partial_t h + \partial_x (hu) = 0 \quad (18a)$$

$$\partial_t u + u \partial_x u = g\gamma - g \partial_x h. \quad (18b)$$

The asymptotic solution of this system of equations for wave propagation over sloping bathymetry has been given for several initial-value problems using a hodograph transformation (Carrier and Greenspan, 1957; Pelinovsky and Mazova, 1992; Synolakis, 1987), also for the boundary-value problem (Antuono and Brocchini, 2007; Li and Raichlen, 2001; Madsen and Schaffer, 2010) that will be used in this article. Since the system is hyperbolic, it has the following characteristic forms

$$\frac{d\alpha}{dt} = 0 \quad \text{on} \quad \frac{dx}{dt} = u - c \quad (19a)$$

$$\frac{d\beta}{dt} = 0 \quad \text{on} \quad \frac{dx}{dt} = u + c, \quad (19b)$$

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



in which $c = \sqrt{gh}$ and

$$\alpha = 2c - u + g\gamma t, \quad \beta = 2c + u - g\gamma t. \quad (20)$$

Variables α and β are the so-called Riemann invariants since they do not change their value along the characteristics curves in Eq. (19). Assuming the flow to be subcritical (that is $|u| < c$), the first characteristics curves with $u - c < 0$ are called “incoming” since they propagate signals towards the shore. The second ones with $u + c > 0$ are called “outgoing” since they move towards the deeper waters (carrying information on the wave reflection at the shoreline).

3.2 A trivial solution of characteristic curve

In the trivial case of no motion ($u = \eta \equiv 0$) as well as the dynamic case presented later, we focus on the incoming characteristic curve. In the rest case, it is given by

$$\frac{dx}{dt} = -\sqrt{g\gamma x}. \quad (21)$$

For $x \neq 0$, substituting $y = \sqrt{g\gamma x}$ results in the general solution for variable y as follows

$$y = -\frac{1}{2}g\gamma t + C_2,$$

with a constant C_2 . When the curve intersects $x = B$ at time τ , with h_0 the depth at $x = B$, such that $h_0 = \gamma B$ and $y(B) = \sqrt{g\gamma B} = c_0$, the particular solution is given by

$$y = \frac{2c_0 - g\gamma(t - \tau)}{2}.$$

In case of no motion, the boundary data $\alpha = \alpha_0(\tau)$ and $\beta = \beta_0(\tau)$ are as follows

$$\alpha_0 = 2c_0 + g\gamma\tau, \quad \beta_0 = 2c_0 - g\gamma\tau. \quad (22)$$

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Transforming back to the x variable, while using these expressions, we get the incoming characteristic curve

$$x = \frac{1}{4g\gamma}(g\gamma t - \alpha_0)^2 = \frac{g\gamma(2\omega - (t - \tau))^2}{4} \quad (23)$$

5 with $\omega = c_0/(g\gamma)$. Along this characteristic curve, the Riemann invariant is constant.

Figure 2 shows the characteristic curves of the dimensionless NSWE over sloping bathymetry $b(x) = -x$ for $x \in [0, 1]$ and LSWE over flat bathymetry $h_0 = 1$, $B = 1$ for $x \in [1, 2]$. As in our previous paper (Kristina et al., 2012), the characteristic curve of the LSWE are given by $dx/dt = \pm c_0$. The “incoming” and “outgoing” characteristic curves are shown by the solid and dashed lines respectively.

10 For each characteristic curve (23), the location of the shoreline can be determined by looking for the $\tau = \tau_s$ for which the characteristic reaches the shoreline position, here $x = 0$, at time t . It is given by the condition

$$15 \frac{\partial x}{\partial \tau} = 0 \text{ so that } \tau_s = t - 2\omega. \quad (24)$$

As displayed in Fig. 2, the incoming characteristic curves that reach the shoreline at time t , intersect $x = B = 1$ at time $\tau = t - 2$ ($\omega = 1$ in this case). Since $u = 0$ in the rest case, the boundary condition (11) is of course satisfied.

3.3 Boundary Value Problem (BVP)

20 Li and Raichlen (2001) and Synolakis (1987) combine linear and nonlinear theory to reduce the difficulties in the assignment of the boundary data for solving the BVP problem in the NSWE. Later, it is shown that the proper way to solve the assignment problem without using linear theory at all is not given in terms of η or u (both are shown to be ill posed; Antuono and Brocchini, 2007) but in terms of the incoming Riemann variable α . Antunono and Brocchini (2010) use this incoming Riemann variable as

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



boundary data and solve the dimensionless NSW by direct use of physical variables instead of using the hodograph transformation introduced by Carrier and Greenspan (1957).

Given the data of η and u at the seaward boundary $x = B$, $\forall t \in \mathbb{R}$ (see Fig. 1), we want to find a solution of the NSW in the sloping region to the shoreline including the reflected waves traveling back into the deeper waters. In accordance to the previous trivial case, the initial time where a characteristic meets $x = B$ is labeled as τ and we write $x = \chi(t, \tau)$, so we have the data $\alpha = \alpha_0 \equiv 2c(B, \tau) - u(B, \tau) + g\gamma\tau$ along the incoming characteristic curves and $\beta = \beta_0 \equiv 2c(B, \tau) + u(B, \tau) - g\gamma\tau$ along the outgoing characteristic curves. Then we can rewrite Eq. (19) as

$$\alpha = \alpha_0 \text{ on curves such that } \chi_t = u - c = \frac{\beta - 3\alpha_0}{4} + g\gamma t \quad (25a)$$

$$\beta = \beta_0 \text{ on curves such that } \chi_t = u + c = \frac{3\beta_0 - \alpha}{4} + g\gamma t, \quad (25b)$$

which means that the boundary values are carried by the incoming and outgoing characteristic curves. To be concise, we write $\chi_t = \partial_t \chi$ and $\chi_\tau = \partial_\tau \chi$. Our aim is to obtain a closed equation for the dynamics and we focus on the incoming characteristic by fixing $\alpha = \alpha_0$. We can rewrite Eq. (25a) as follows

$$\beta = 3\alpha_0 + 4(\chi_t - g\gamma t). \quad (26)$$

Here $\beta = \beta(\chi, t)$ since we are moving along an incoming characteristic curve. By taking the total t derivative of β , we obtain

$$\frac{d\beta}{dt} = \beta_t + \beta_x \chi_t = \beta_t + \left(\frac{\beta - 3\alpha_0}{4} + g\gamma t \right) \beta_x = 4(\chi_{tt} - g\gamma), \quad (27)$$

in which the last equality comes from Eq. (26). In addition, the τ -derivative of Eq. (26) gives

$$\frac{\partial \beta}{\partial \tau} = \beta_x \chi_\tau = 3\dot{\alpha}_0 + 4\chi_{t\tau} \Rightarrow \beta_x = \frac{3\dot{\alpha}_0 + 4\chi_{t\tau}}{\chi_\tau}. \quad (28)$$

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



We still need an explicit expression for β_t which can be obtained by rewriting Eq. (19b) in the following way

$$\beta_t + \left(\frac{3\beta - \alpha_0}{4} + g\gamma t \right) \beta_x = 0. \quad (29)$$

5 Combining Eqs. (27)–(29), we get the following differential equation for the incoming characteristic curves:

$$2\chi_\tau(\chi_{tt} - g\gamma) = (4\chi_{t\tau} + 3\dot{\alpha}_0)(g\gamma t - \alpha_0 - \chi_t) \text{ for } t > \tau. \quad (30a)$$

with boundary conditions

$$10 \quad \chi|_{t=\tau} = B \quad (30b)$$

$$\chi_\tau|_{\tau=\tau_s} = 0. \quad (30c)$$

The second boundary condition is the shoreline boundary condition. We have $4c = \alpha + \beta$ from Eq. (20), which implies $\beta = -\alpha$ at the shoreline $c = 0$. Using Eq. (26), we note that $4c = \alpha_0 + \beta = 4(\alpha_0 + \chi_t - g\gamma t) = 0$ at the shoreline. Hence, the right-hand-side of Eq. (30a) is zero, such that for consistency χ_τ must be zero at the shoreline since generally $\chi_{tt} \neq g\gamma$.

3.3.1 Perturbation expansion

20 Due to the nonlinearity in χ , we use a perturbation method to solve Eq. (30). We expand it in perturbation series around the rest solution (23) with a small parameter $\epsilon = A/h_0$ (A is the wave amplitude):

$$\alpha_0 = \alpha_{0,0} + \epsilon\alpha_{0,1} + \mathcal{O}(\epsilon^2), \quad (31a)$$

$$\chi = \chi^{(0)} + \epsilon\chi^{(1)} + \mathcal{O}(\epsilon^2), \quad (31b)$$

$$25 \quad \tau_s = \tau_0(t) + \epsilon\tau_1(t) + \mathcal{O}(\epsilon^2). \quad (31c)$$

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



in which $\alpha_{0,0} = 2c_0 + g\gamma\tau$ is the incoming Riemann invariant in case of no motion, $\chi^{(0)}$ is given by Eq. (23), and $\tau_0 = t - 2\omega$. By substituting Eq. (31) into Eq. (30), we obtain at first order in ϵ :

$$(2\omega - t + \tau) \left(\chi_{tt}^{(1)} + 2\chi_{t\tau}^{(1)} \right) - \left(\chi_{\tau}^{(1)} - \chi_t^{(1)} - \alpha_{0,1} \right) + \frac{3}{2} (2\omega - t + \tau) \dot{\alpha}_{0,1} = 0, \quad (32a)$$

$$\chi_{t=\tau}^{(1)} = 0, \quad (32b)$$

$$\chi_{\tau\tau}^{(0)}(t, \tau_0) \tau_1 + \chi_{\tau}^{(1)}(t, \tau_0) = 0. \quad (32c)$$

By letting $Y^{(1)} = \chi^{(1)} - (2\omega - t + \tau)\alpha_{0,1}/2$, we can rewrite Eq. (32a) as

$$(2\omega - t + \tau) \left(Y_{tt}^{(1)} + 2Y_{t\tau}^{(1)} \right) - Y_{\tau}^{(1)} + Y_t^{(1)} = 0. \quad (33)$$

Then, we make the change of variables $\nu = -(2\omega - t + \tau)$ and $\xi = \tau$, and Eq. (33) becomes

$$\nu \left(2Y_{\nu\xi}^{(1)} - Y_{\nu\nu}^{(1)} \right) - 2Y_{\nu}^{(1)} + Y_{\xi}^{(1)} = 0. \quad (34)$$

Denote the Fourier transform $\mathcal{F}(\cdot)$ with respect to ξ

$$\rho^{(1)}(\nu, s) = \mathcal{F} \left(Y^{(1)}(\nu, \xi) \right) (s) = \int_{-\infty}^{\infty} Y(\nu, \xi) e^{-is\xi} d\xi, \quad (35)$$

we obtain from Eq. (34) a differential equation related to a Bessel equation:

$$\nu \left(2is\rho_{\nu}^{(1)} - \rho_{\nu\nu}^{(1)} \right) - 2\rho_{\nu}^{(1)} + is\rho^{(1)} = 0, \quad (36)$$

which has general solution

$$\rho^{(1)}(\nu, s) = e^{is\nu} \left(A_1(s) [J_0(s\nu) - iJ_1(s\nu)] + A_2(s) [iY_0(s\nu) + Y_1(s\nu)] \right) \quad (37)$$

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



with $J_{0,1}$ and $Y_{0,1}$ the Bessel functions of the first and second kind. To recover $Y(\nu, \xi)$, we just need to take the inverse Fourier transform of Eq. (37), and by using $Y^{(1)} = \chi^{(1)} + \nu\alpha_{0,1}/2$, we get

$$\chi^{(1)}(\nu, \xi) = \frac{1}{2\pi} \int_{-\infty}^{\infty} e^{is(\nu+\xi)} (A_1(s) [J_0(sv) - iJ_1(sv)] + A_2(s) [iY_0(sv) + Y_1(sv)]) ds - \frac{\nu}{2}\alpha_{0,1} \quad (38)$$

with $\xi = \tau \leq t$.

3.3.2 Boundary value assignment

In order to calculate the unknown function $A_1(s)$ and $A_2(s)$, we need to assign the boundary conditions (30). In (ν, ξ) space, $t = \tau$ corresponds to $\nu = -2\omega$, and by imposing the first boundary condition, we get

$$-\mathcal{F}(\alpha_{0,1}) \omega e^{2is\omega} = A_1(s) [J_0(2s\omega) + iJ_1(2s\omega)] + A_2(s) [iY_0(2s\omega) - Y_1(2s\omega)]. \quad (39)$$

The second boundary condition is given by Eq. (32c) in which

$$\chi_{\tau}^{(1)} = -\chi_{\nu}^{(1)} + \chi_{\xi}^{(1)} = \frac{i}{2\pi} \int_{-\infty}^{\infty} e^{is(\nu+\xi)} \left(A_1(s) \left[sJ_0(sv) - isJ_1(sv) - \frac{J_1(sv)}{\nu} \right] + A_2(s) \left[isY_0(sv) + sY_1(sv) + \frac{Y_1(sv)}{i\nu} \right] \right) ds + \frac{\alpha_{0,1}}{2} - \frac{\nu\dot{\alpha}_{0,1}}{2}, \quad (40)$$

evaluated at $\tau = \tau_0$, i.e., $\nu = 0$ needs to be finite. Evaluating Eq. (40) at $\nu = 0$ gives us convergence when the coefficient $A_2(s)$ is zero, which avoids an unbounded result. Hence, from the first boundary condition (34), coefficient $A_1(s)$ is given by

$$A_1(s) = -\frac{\mathcal{F}(\alpha_{0,1})\omega e^{2is\omega}}{J_0(2s\omega) + iJ_1(2s\omega)}. \quad (41)$$

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Thus, the solution of incoming characteristic curves at the first order is given by

$$\chi^{(1)}(\nu, \xi) = -\frac{1}{2\pi} \int_{-\infty}^{\infty} e^{is(\nu+\xi+2\omega)} \omega \mathcal{F}(\alpha_{0,1}) \frac{J_0(s\nu) - iJ_1(s\nu)}{J_0(2s\omega) + iJ_1(2s\omega)} ds - \frac{\nu}{2} \alpha_{0,1}. \quad (42)$$

The shoreline position must satisfy $\chi_\tau|_{\tau=\tau_s} = 0$, and in the first order approximation it is given by

$$x_s(t) = \chi^{(0)}(t, \tau_0) + \varepsilon \left[\chi_\tau^{(0)}(t, \tau_0) \tau_1 + \chi^{(1)}(t, \tau_0) \right] + \mathcal{O}(\varepsilon^2). \quad (43)$$

Since $\tau = \tau_0$ corresponds with $\nu = 0$ and $\xi = t - 2\omega$, we get

$$x_s(t) = -\mathcal{F}^{-1} \left[\mathcal{F}(\alpha_{0,1}) \frac{\omega}{J_0(2s\omega) + iJ_1(2s\omega)} \right]. \quad (44)$$

4 Effective boundary condition

4.1 Finite element implementation

The region $x \in [B, L]$ will be approximated using a classical Galerkin finite element expansion. We use first order spline polynomials on N elements with $j = 1, \dots, N + 1$ nodes. The variational structure is simply preserved by substituting the expansions

$$\check{\phi}_h(x, t) = \phi_j(t) \varphi_j(x), \quad \check{\psi}_h(x, t) = \psi_j(t) \varphi_j(x), \quad \text{and} \quad \check{\eta}_h(x, t) = \eta_j(t) \varphi_j(x) \quad (45a)$$

into Eq. (5) for $x \in [B, L]$ concerning N elements and $(N + 1)$ basis functions φ_j . We used the Einstein summation convention for repeated indices.

To ensure continuity and a unique determination, we employ Eq. (12) and substitute

$$\phi(x, t) = \check{\phi}(x, t) + \phi_1(t) \varphi_1(x) + \frac{\tilde{\beta}}{h_b} \psi_1(t) \varphi_1(x) \quad \text{and} \quad \eta(x, t) = \check{\eta}(x, t) + \eta_1(t) \varphi_1(x) \quad (45b)$$

with φ_1 the basis function in element 0 for $x \in [x_s, B]$ and with $\tilde{\phi}(B, t) = \tilde{\eta}(B, t) = 0$. For linear polynomials, use of Eq. (45) into Eq. (5) yields

$$0 = \delta \int_0^T \left[\mathbf{M}_{kl} \phi_k \dot{\eta}_l - \frac{1}{2} g \mathbf{M}_{kl} \eta_k \eta_l - \frac{1}{2} \mathbf{S}_{kl} \phi_k \phi_l - \mathbf{B}_{kl} \psi_k \phi_l - \frac{1}{2} \mathbf{A}_{kl} \psi_k \psi_l - \frac{1}{2} \mathbf{G}_{kl} \psi_k \psi_l + \int_{x_s}^B \left(\phi \partial_t \eta - \frac{1}{2} g \eta^2 - \frac{1}{2} h (\partial_x \phi)^2 \right) dx \right] dt \quad (46a)$$

$$\begin{aligned} &= \int_0^T \left[\left(\mathbf{M}_{kl} \dot{\eta}_l - \mathbf{S}_{kl} \phi_l - \mathbf{B}_{kl} \psi_l \right) \delta \phi_k - \left(\mathbf{M}_{kl} \dot{\phi}_k + g \mathbf{M}_{kl} \eta_k \right) \delta \eta_l - \left(\mathbf{A}_{kl} \psi_l + \mathbf{B}_{kl} \phi_l + \mathbf{G}_{kl} \psi_l \right) \delta \psi_k \right. \\ &\quad \left. + \int_{x_s}^B \left((\partial_t \eta + \partial_x (h \partial_x \phi)) \delta \tilde{\phi} - \left(\partial_t \phi + g \eta + \frac{1}{2} \partial_x^2 \phi \right) \delta \tilde{\eta} \right) dx \right. \\ &\quad \left. + (\phi \delta \eta) \Big|_{x=x_s} \frac{dx_s}{dt} - (\phi \partial_t \eta) \Big|_{x=x_s} \delta x_s \right. \\ &\quad \left. + \int_{x_s}^B \left((\partial_t \eta + \partial_x (h \partial_x \phi)) \varphi_1 \delta \phi_1 - \left(\partial_t \phi + g \eta + \frac{1}{2} \partial_x^2 \phi \right) \varphi_1 \delta \eta_1 \right) dx \right. \end{aligned}$$

$$\left. - h \partial_x \phi \Big|_{x=B} \delta \phi_1 - \frac{\tilde{\beta}}{h_b} h \partial_x \phi \Big|_{x=B} \delta \psi_1 \right] dt, \quad (46b)$$

where we introduced mass and stiffness matrices \mathbf{M}_{kl} , \mathbf{S}_{kl} , \mathbf{A}_{kl} , \mathbf{B}_{kl} , \mathbf{G}_{kl} , and used endpoint conditions $\delta \eta_k(0) = \delta \eta_k(T) = 0$, connection conditions $\delta \tilde{\eta}(B, t) = \delta \tilde{\phi}(B, t) =$

$\delta\tilde{\psi}(B, t) = 0$, and no-normal through flow conditions at $x = L$. The matrices in Eq. (46) are defined as follows

$$\mathbf{M}_{kl} = \int_B^L \varphi_k \varphi_l dx, \quad \mathbf{S}_{kl} = \int_B^L h \partial_x \varphi_k \partial_x \varphi_l dx, \quad \mathbf{A}_{kl} = \int_B^L \check{\alpha} \partial_x \varphi_k \partial_x \varphi_l dx, \quad \mathbf{B}_{kl} = \int_B^L \check{\beta} \partial_x \varphi_k \partial_x \varphi_l dx,$$

and $\mathbf{G}_{kl} = \int_B^L \check{\gamma} \varphi_k \varphi_l dx.$ (47)

Provided we let the size of the zeroth element go to zero such that the underline terms in Eq. (46b) vanish, the equations arising from Eq. (46) are

$$\mathbf{M}_{kl} \dot{\eta}_l - \mathbf{S}_{kl} \phi_l - \mathbf{B}_{kl} \psi_l - \delta_{k1} (h \partial_x \phi) |_{x=B^-} = 0 \quad (48a)$$

$$\mathbf{M}_{kl} \dot{\phi}_k + g \mathbf{M}_{kl} \eta_k = 0 \quad (48b)$$

$$\mathbf{A}_{kl} \psi_l + \mathbf{B}_{kl} \phi_l + \mathbf{G}_{kl} \psi_l - \delta_{k1} \left(\frac{\check{\beta}}{h_b} h \partial_x \phi \right) |_{x=B^-} = 0 \quad (48c)$$

with Kronecker delta symbol δ_{kl} (one when $k = l$ and zero otherwise) and Eq. (9) for $x \in [x_s, B]$ with boundary condition (11). Taking this limit does not jeopardize the time step, as this zeroth element lies in the continuum region, in which the resolution is infinite. The time integration is solved using ode45 in MATLAB that uses its internal time step.

From Eq. (48), we note that we need the depth h and the velocity u from the nonlinear model at $x = B$, whose values are given at time $t = \tau$ in the characteristic space. The definitions (20), while using $\alpha = \alpha_0$ and β in Eq. (26) with expansions up to first order,

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



yield

$$\begin{aligned}
 h &= c^2/g = \frac{1}{16g} (\alpha_0 + \beta)^2 \\
 &= \left(\alpha_{0,0} + \chi_t^{(0)} - g\gamma t + \epsilon \left(\alpha_{0,1} + \chi_t^{(1)} \right) \right)^2 / g \\
 &= \left(\alpha_{0,0} + \frac{g\gamma t - \alpha_{0,0}}{2} - g\gamma t + \epsilon \left(\alpha_{0,1} + \chi_t^{(1)} \right) \right)^2 / g \\
 &= \left(c_0 + \frac{1}{2}g\gamma(\tau - t) + \epsilon \left(\alpha_{0,1} + \chi_t^{(1)} \right) \right)^2 / g
 \end{aligned} \tag{49a}$$

$$u = g\gamma t + \frac{1}{2}(\beta - \alpha_0) = \epsilon \left(\alpha_{0,1} + 2\chi_t^{(1)} \right). \tag{49b}$$

Note that for $\epsilon = 0$, we indeed find the rest depth $h_b(x) = \gamma x$. The function $\chi_t^{(1)}$ follows from evaluation of Eq. (42) and since $t = \tau$ is equivalent to $\nu = -2\omega$, we immediately obtain

$$\chi_t^{(1)}|_{t=\tau} \equiv \chi_\nu^{(1)}(-2\omega, \xi) = -\frac{i}{4\pi} \int_{-\infty}^{\infty} e^{is\xi} \mathcal{F}(\alpha_{0,1}) \frac{J_1(2s\omega)}{J_0(2s\omega) + iJ_1(2s\omega)} ds - \frac{\alpha_{0,1}}{2}. \tag{50}$$

Thus, the solutions of h and u at $t = \tau$ are given as follows

$$h(B, t) = h_b + \eta = \frac{c_0^2}{g} + \epsilon \frac{c_0}{g} \mathcal{F}^{-1} \left[\mathcal{F}(\alpha_{0,1}) \frac{J_0(2s\omega)}{J_0(2s\omega) + iJ_1(2s\omega)} \right] \tag{51a}$$

$$u(B, t) = -\epsilon \mathcal{F}^{-1} \left[\mathcal{F}(\alpha_{0,1}) \frac{iJ_1(2s\omega)}{J_0(2s\omega) + iJ_1(2s\omega)} \right]. \tag{51b}$$

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



In order to calculate the solution for h and u at $x = B$ and the shoreline position, we need the data of incoming Riemann invariants at the first order as follows

$$\epsilon\alpha_{0,1} \approx \alpha - \alpha_{0,0} = 2 \left(\sqrt{g(\gamma B + \check{\eta})} - \sqrt{g\gamma B} \right) \Big|_{x=B^+} - \check{u} \Big|_{x=B^+}, \quad (52)$$

that is obtained by disregarding higher order terms in Eq. (31a). This expression is actually the incoming Riemann invariant in LSWE (Kristina et al., 2012). Thus, in imposing the effective boundary condition (EBC) and choosing the location $x = B$ before the nonlinearity arises, actually we do the perturbation expansion to solve the nonlinear area, but we do not perturb the incoming wave data.

The values $\check{\eta}_h$ and \check{u} in Eq. (52) are obtained from the simulation area $[B, L]$. In this region, we only have the values of $\check{\eta}$, $\check{\phi}$, and $\check{\psi}$. The depth-averaged velocity $u(B^+, t)$ is determined by using the approximation (12) as follows

$$\check{u} = \partial_x \check{\phi} + \frac{\check{\beta}}{h_b} \partial_x \check{\psi} \quad \text{at } x = B^+, \quad (53)$$

which is the limit from the right at node 1.

The solutions of $\eta = h - h_b$ and u in Eq. (51) account for the reflected wave, so we may define

$$\eta = \eta^l + \eta^R \quad \text{and} \quad u = u^l + u^R \quad (54)$$

for η^l and η^R are the wave elevations of incoming and reflected wave respectively at $x = B$. Taking this superposition is actually in line with our EBC concept since the linearity holds in the simulation area. To obtain the expression for the reflected wave, we need to know the incoming one. Using the knowledge of incoming and outgoing Riemann invariants in the LSWE as derived in Kristina et al. (2012), the observation operator is given by

$$\mathcal{O} = h\check{u} + c\check{\eta} = 2c\eta^l, \quad (55)$$

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



which is calculated using approximation (53). Thus, we can calculate the incoming wave elevation for any given wave signal at $x = B$. It is an enhancement from Antunono and Brocchini (2010) and Madsen and Schaffer (2010) who use the solution of the KdV equation for wave traveling over flat bathymetry to define the incoming wave signal at $x = B$. Implementation of this observation operator allows us to have any initial waveform at the point of tsunami generation, and let it travel over the real bathymetry to the seaward boundary point $x = B$. From Eq. (51), the expressions for the reflected wave are as follows

$$\eta^R = \mathcal{M}(\eta^I) = \frac{c_0}{g} \mathcal{F}^{-1} \left[\mathcal{F}(\epsilon \alpha_{0,1}) \frac{J_0(2s\omega)}{J_0(2s\omega) + iJ_1(2s\omega)} \right] - \eta^I \quad (56a)$$

$$u^R = \mathcal{M}(u^I) = -\mathcal{F}^{-1} \left[\mathcal{F}(\epsilon \alpha_{0,1}) \frac{iJ_1(2s\omega)}{J_0(2s\omega) + iJ_1(2s\omega)} \right] - u^I, \quad (56b)$$

with the Fourier transform and its inverse for any incoming wave signal is evaluated using the FFT and IFFT functions in MATLAB.

The influxing operator is defined as the coupling condition in Eq. (48) to send NSWE result to the simulation area. It is shown that we need the value of $h\partial_x\phi$, and hence

$$\mathcal{J} = h\partial_x\phi = (h_b + \eta)u. \quad (57)$$

In order to verify the EBC implementation, we perform numerical simulations with a code that couples the LSWE in the simulation area with the NSWE in the model area (Bokhove, 2005; Klaver, 2009). For numerical simulation of the LSWE, we use a finite element method, while for the NSWE we use a finite volume method. The implementation of the finite volume method is explained in Appendix A.

5 Study case

Three test cases are considered. The first one is a synthetic one concerning a solitary wave, such that we can compare with other results. Subsequently, we consider periodic

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



wave influx as the second case to test the robustness of the technique when there is continuous interaction between the incoming and reflected wave. The third case is a more realistic one concerning tsunami propagation and run-up based on simplified bathymetry at the Aceh coastline.

The location of the EBC point is determined from the linearity condition $\delta = A_0/h_0 \ll 1$. From linear theory, the wave amplification over depth is given by the ratio $A_0 = A\sqrt[4]{h/h_0}$, where A and h are the initial wave amplitude and depth. Hence, the EBC point must be located at depth

$$h_0 \gg \sqrt[5]{A^4 h / \delta^4}. \quad (58)$$

Since a dispersive model is also used in the simulation area, we will discuss the dispersion effect at this EBC point as well. The non-dispersive condition is given by $\mu^2 = (k_0 h_0)^2 \ll 1$, with $k_0 = 2\pi/\lambda_0$ is the wavenumber and λ is the wavelength. In linear wave theory, the wavelength decreases with the square root of the depth when running in shallower water, that is $\lambda_0 = \lambda\sqrt{h_0/h}$. Thus, using this relation we can investigate the significance of the dispersion given the information of the initial condition and bathymetry profile.

5.1 Solitary wave

We study the run-up of a solitary wave by means of the well-known case studied by Synolakis (1987). A solitary wave centered at $x = x_0$ at $t = 0$ has the following surface profile:

$$\eta(x, 0) = A \operatorname{sech}^2 \kappa(x - x_0)$$

for $\kappa = 0.04$, $x_0 = 150$ m, and $A = 0.1$ m is the amplitude. The bathymetry is given by constant depth 10m for $x > 50$ m, continued by a constant slope $\gamma = 1/5$ towards the shore. A uniform spatial grid $\Delta x = 1$ m is used in the simulation area and $\Delta x = 0.015$ m

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



in the model area for the numerical solution of the NSW. In all cases, several spatial resolutions have been applied to verify numerical convergence. For the time integration, we use the fourth order ode45 solver that uses its own time step in MATLAB.

Evaluating Eq. (58) for $\delta = 0.02 \ll 1$, the EBC point must be located at $h_0 \gg 3.3$ m.

Accordingly, we choose this seaward boundary point at $h_0 = 10$ m at the toe of the slope, that is at $x = B = 50$ m. Therefore, we divide the domain into the simulation area for $x \in [50, 250]$ m and the model area for $x \in [-5, 50]$ m. In Fig. 3, we can see the initial profile of the solitary wave. The dashed and dotted-dashed lines represent the coupling of the linear model (LSWE or LVBM) with the NSW, respectively, and the solid one represents the linear model with an EBC implementation. The thick solid line is the sloping bathymetry. Comparisons between these two simulations at several time steps can be seen in Fig. 4 (left: LSWE, right: LVBM). Comparing the left and right figures, we can see that the wave is slightly dispersed in the LVBM. Because we have flat bathymetry in this case, the dispersion ratio at the simulation area is constant and given by $\mu^2 = 0.39 < 1$. Hence, it is shown the long waves propagate faster than the shorter ones in LVBM simulations. In Fig. 5, the shoreline position caused by this solitary wave is shown with the dashed line for the coupled numerical simulation, and the solid one for linear model with an EBC implementation. The paths of characteristic curves forming the shoreline are also shown in this figure. We can see that the shoreline is formed by the envelope of the characteristic curves. The result with the LVBM shows a lower run-up but higher run-down with some oscillations at later times.

For simulation until physical time $t = 40$ s, the computational time for the coupled numerical solutions in both domains is 2.9 times the physical time for the LSWE and 3.1 times for the LVBM. While the computational time of simulation using an EBC only takes 0.12 times the physical time for the LSWE and 0.05 times for the LVBM. Hence, we notice that the simulation with the EBC reduces the computational time significantly, up to approximately 98 %, compared with the computational time in the whole domain. The computational time for the LSWE with an EBC is slower than the one with LVBM

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



and an EBC, because the internal time step of the ode45 time step routine in MATLAB required a smaller time step dt (compared to the LVBM) to preserve the stability.

The shoreline movement of our result compare well with the one of Choi et al. (2011). We can see the comparison in Fig. 6. The result of simulation with EBC implementation is shown by solid line and the result of Choi is shown by the dashed one. The solution of Choi gives higher prediction for the shoreline, but it cannot follow the subsequent small positive wave. It may be caused by neglecting the reflection wave and nonlinear effects in their formulation. We also compare the free-surface profile for several time steps in Fig. 7. The dashed and dotted-dashed lines represent the coupling of the LSWE with the NSWE, the solid one represents the LSWE simulation with an EBC implementation, and the solid lines with “o” marker represents the LSWE simulation in the solution of Choi. The thick solid line is the sloping bathymetry. The implementation of the hard-wall boundary condition at $x = B$ in Choi’s method causes that the point-wise wave height in the whole domain cannot be predicted accurately. In this case, the effect of reflected waves for shoreline movement prediction is small, but it may become important when a compound of waves arrives at the coastline.

5.2 Periodic wave

Using the same bathymetry profile as the first case, we influx a periodic wave at the right boundary ($x = L$) with the profile:

$$\eta(L, t) = A \sin(2\pi t/T)$$

in which $A = 0.05$ m is the amplitude and period $T = 20$ s. A smoothed characteristic function until $t = 10$ s is used in influxing this periodic wave. We use uniform spatial grid $\Delta x = 1$ m in the simulation area and $\Delta x = 0.015$ m in the model area for the numerical solution of the NSWE.

According to the solitary wave case, we also choose this seaward boundary point at $h_0 = 10$ m at the toe of the slope, that is at $x = B = 50$ m. Thus, the simulation area is for $x \in [50, 250]$ m and the model area for $x \in [-5, 50]$ m. Comparisons between these two

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

simulations at several time steps can be seen in Fig. 8 (left: LSWE, right: LVBM). The dashed and dotted-dashed lines represent the coupling of the linear model (LSWE or LVBM) with the NSWE, respectively, and the solid one represents the linear model with an EBC implementation. The thick nearly vertical solid line on the left is the sloping bathymetry. We can see in the comparison that the wave is slightly dispersed in the LVBM. The dispersion ratio at the simulation area is given by $\mu^2 = 0.0986 < 1$, which is less dispersive than the first case. In Fig. 9, the shoreline movement caused by the periodic wave is shown with the dashed line for the coupled numerical simulation, and the solid one for linear model with an EBC implementation. The paths of characteristic curves forming the shoreline are also shown in this figure by the thin lines. Observing the results of this case, we can conclude that the EBC technique can deal robustly with consecutive interactions between incoming and reflected wave.

For simulation until physical time $t = 80$ s, the computational time for the coupled numerical solutions in both domains is 2.76 times the physical time for the LSWE and 3.02 times for the LVBM. While the computational time of simulation using an EBC only takes 0.07 times the physical time for the LSWE and 0.06 times for the LVBM. Obviously, we notice that the simulation with the EBC reduces the computational time up to approximately 98%, compared with the computational time for whole domain simulation.

5.3 Simulation using simplified Aceh bathymetry

The bathymetry near Aceh, Indonesia, is displayed in Fig. 10. Figure 10a concerns bathymetry data from GEBCO, with zero value for the land. Figure 10b concerns the cross section at (95.0278° E, 3.2335° N)–(96.6583° E, 3.6959° N) shown by the solid line. The initial “N”-wave profile taken is

$$\eta(x, 0) = Af(x)/S \quad \text{with} \quad f(x) = \frac{d}{dx} \exp\left(-\frac{(x-x_0)^2}{w_0^2}\right) \quad \text{and} \quad S = \max(f(x)) \quad (59)$$

and the initial velocity potential is zero. We take $A = 0.4$ m, the position of the wave profile $x_0 = 107.4$ km, and the width $w_0 = 35$ km.

The location of the EBC point is also determined from Eq. (58). For $\delta = 0.02 \ll 1$, the linear model is valid for $h_0 \gg 25.1$ m. Hence, we choose the EBC point at depth $h_0 = 41.4$ m, which is located at $x = B = 12.4$ km. Thus, the simulation area is for $x \in [12.4, 162.4]$ km, where we follow the real bathymetry of Aceh to calculate the wave propagation. It is coupled with the model area for $x \in [-8.6, 12.4]$ km, where a uniform slope with gradient $\gamma = 1/300$ is used to calculate the reflection and shoreline position.

We use an irregular grid according to the depth with ratio $\sqrt{h_0/h}$ as the decrease of the wavelength when traveling from a deep region with depth h and a shallower region with depth h_0 in linear wave theory. The grid size used in the simulation area is $\Delta x = 305$ m at the shallowest area near $x = B$. This choice of spatial resolution is fairly close to tsunami numerical simulation (Horrillo et al., 2006 use $\Delta x = 100$ m offshore and $\Delta x = 10$ m onshore in one dimensional simulations). For numerical solution of the NSWE in the model area, a uniform grid $\Delta x = 3$ m is used.

In Fig. 11, we show the initial profile. The dashed and dotted-dashed lines again represent the linear model coupled to the NSWE, and the solid one represents the linear model with an EBC implementation at $x = B = 12.4$ km. The thick solid line is the sloping bathymetry. Comparisons between these two simulations at several time steps can be seen in Fig. 12. In this case, the wave elevation measured at B has been deformed from its initial condition due to the reflection from the bathymetry before entering the model area, see Fig. 12a and b. We hardly see any differences between the LSWE and LVBM simulations because the wavelength is much larger than the depth. The dispersion ratio at the initial condition is given by $\mu^2 = 0.002 \ll 1$, and at the EBC point is approximately $\mu^2 = 7.5 \times 10^{-5} \ll 1$. Therefore, the dispersion effect is not significant in this case. In Fig. 13, the shoreline position is shown with the dashed line for the coupled numerical simulation, and the solid one for the linear model with the EBC implementation. From this plot, it is shown that the wave runs up 1 km in the horizontal direction in approximately 10 min, roughly in the time interval from 50

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



point towards the coastline over a simplified sloping bathymetry. The advantages of using this EBC are the ability to measure the incoming wave signal at the boundary point $x = B$ for various shapes of incoming waves, and thereafter to calculate the wave run-up and reflection from these measured data. To solve the tsunami wave run-up in nearshore area analytically, we employ the asymptotic technique for solving the NSWE over sloping bathymetry derived by Antunono and Brocchini (2010), applied to any given wave signal at $x = B$.

We have considered three test cases to verify our approach by comparing simulations in the whole domain (using numerical solutions of the LSWE/LVBM coupled to the NSWE) with ones using the EBC. The location of the boundary point $x = B$ is considered before the nonlinearity plays an important role in the wave propagation. The comparisons between both simulations show that the EBC method give a good prediction of the wave run-up as well as the wave reflection, based only on the information of the wave signal at this seaward boundary point. The computational times needed in simulations using the EBC implementation show a large reduction compared to times required for corresponding full numerical simulations. Hence, without losing the accuracy of the results, we could compress the time needed to simulate wave dynamics in the nearshore area.

An extension of this EBC method to two dimensions (2-D) can be done in a direct way by using the approach of Ryrie (1983). For waves incident at a small angle to the beach normal, the onshore problem can be calculated using the analytical 1-D run-up theory of the nonlinear model, and independently the longshore velocity can be computed asymptotically. By using a 2-D linear model in the open sea towards the seaward boundary line (i.e., in the simulation area) and employing this approach in the model area, we can in principle apply the EBC method for this 2-D case as well. This will be approximately valid for 2-D flow with slow variations along the EBC line.

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Appendix A

Finite volume implementation

The conservative form of NSWE are given by

$$\frac{\partial \mathbf{u}}{\partial t} + \frac{\partial \mathbf{f}(\mathbf{u})}{\partial x} = \mathbf{s} \quad (\text{A1})$$

with

$$\mathbf{u} = \begin{pmatrix} hu \\ h \end{pmatrix} \quad \mathbf{f}(\mathbf{u}) = \begin{pmatrix} hu^2 + \frac{1}{2}gh^2 \\ hu \end{pmatrix}, \quad (\text{A2})$$

and the topographic term \mathbf{s}

$$\mathbf{s} = \begin{pmatrix} -gh \, db/dx \\ 0 \end{pmatrix}. \quad (\text{A3})$$

The system (A1) is discretized using a Godunov finite volume scheme. First the domain $[A, B]$, with some fixed $A < x_s(t)$ is partitioned into N grid cells with grid cell k occupying $x_{k-\frac{1}{2}} < x < x_{k+\frac{1}{2}}$. The Godunov finite volume scheme is derived by defining a space-time mesh with element $x_{k-\frac{1}{2}} < x < x_{k+\frac{1}{2}}$ and $t_n < t < t_{n+1}$ and integrating Eqs. (A1) over this space-time element

$$\int_{x_{k-\frac{1}{2}}}^{x_{k+\frac{1}{2}}} \mathbf{u}(x, t_{n+1}) dx - \int_{x_{k-\frac{1}{2}}}^{x_{k+\frac{1}{2}}} \mathbf{u}(x, t_n) dx = \int_{t_n}^{t_{n+1}} \mathbf{f}(\mathbf{u}(x_{k-\frac{1}{2}}, t)) dt - \int_{t_n}^{t_{n+1}} \mathbf{f}(\mathbf{u}(x_{k+\frac{1}{2}}, t)) dt + \int_{t_n}^{t_{n+1}} \int_{x_{k-\frac{1}{2}}}^{x_{k+\frac{1}{2}}} \mathbf{s} \, dx dt. \quad (\text{A4})$$

In the grid cells, we define the mean cell average $\mathbf{U}_k = \mathbf{U}_k(t)$ as

$$\mathbf{U}_k(t) := \frac{1}{h_k} \int_{x_{k-\frac{1}{2}}}^{x_{k+\frac{1}{2}}} \mathbf{u}(x, t) dx, \quad (\text{A5})$$

with cell length $h_k = x_{k+\frac{1}{2}} - x_{k-\frac{1}{2}}$. The function \mathbf{U}_k is piecewise constant in each cell. A numerical flux \mathbf{F} is defined to approximate the flux \mathbf{f}

$$\mathbf{F}(\mathbf{U}_k^n, \mathbf{U}_{k+1}^n) \approx \frac{1}{\Delta t} \int_{t_n}^{t_{n+1}} \mathbf{f}(\mathbf{u}(x_{k+\frac{1}{2}}, t)) dt. \quad (\text{A6})$$

5 By using Eqs. (A5)–(A6), expression (A4) then becomes

$$\mathbf{U}_k^{n+1} = \mathbf{U}_k^n - \frac{\Delta t}{h_k} \left(\mathbf{F}(\mathbf{U}_k^n, \mathbf{U}_{k+1}^n) - \mathbf{F}(\mathbf{U}_{k-1}^n, \mathbf{U}_k^n) \right) + \frac{1}{h_k} \int_{t_n}^{t_{n+1}} \int_{x_{k-\frac{1}{2}}}^{x_{k+\frac{1}{2}}} \mathbf{s} dx dt. \quad (\text{A7})$$

which is a forward Euler explicit method.

10 To ensure that the depth is non-negative and that the steady state of a fluid at rest is preserving, the approach of Audusse (2004) is used. The numerical flux \mathbf{F} is then defined as

$$\mathbf{F}(\mathbf{U}_k^n, \mathbf{U}_{k+1}^n) = \mathbf{F}_{k+\frac{1}{2}} \left(\mathbf{U}_{(k+\frac{1}{2})-}^n, \mathbf{U}_{(k+\frac{1}{2})+}^n \right) \quad (\text{A8})$$

where the interface values are given by

$$15 \mathbf{U}_{(k+\frac{1}{2})-}^n = \begin{pmatrix} h_{(k+\frac{1}{2})-} - u_k \\ h_{(k+\frac{1}{2})-} \end{pmatrix} \quad \text{and} \quad \mathbf{U}_{(k+\frac{1}{2})+}^n = \begin{pmatrix} h_{(k+\frac{1}{2})+} + u_{k+1} \\ h_{(k+\frac{1}{2})+} \end{pmatrix}. \quad (\text{A9})$$

The topographic term \mathbf{s} is discretized as

$$\int_{t_n}^{t_{n+1}} \int_{x_{k-\frac{1}{2}}}^{x_{k+\frac{1}{2}}} \mathbf{s} dx dt \approx S_k = \Delta t \begin{pmatrix} \frac{1}{2} g h_{(k+\frac{1}{2})-}^2 - \frac{1}{2} g h_{(k-\frac{1}{2})+}^2 \\ 0 \end{pmatrix}, \quad (\text{A10})$$

with the waterdepths $h_{(k+\frac{1}{2})^-}$ and $h_{(k+\frac{1}{2})^+}$ are chosen as follows to ensure non-negativity of these depths

$$h_{(k+\frac{1}{2})^-} = \max\left(h_k + b_k - b_{k+\frac{1}{2}}, 0\right), \quad h_{(k+\frac{1}{2})^+} = \max\left(h_{k+1} + b_{k+1} - b_{k+\frac{1}{2}}, 0\right), \quad (\text{A11})$$

5 and

$$b_{k+\frac{1}{2}} = \max(b_k, b_{k+1}). \quad (\text{A12})$$

The discretization of the shallow water equations thus reads

$$\mathbf{U}_k^{n+1} = \mathbf{U}_k^n - \frac{\Delta t}{h_k} \left(\mathbf{F}_{k+\frac{1}{2}} \left(\mathbf{U}_{(k+\frac{1}{2})^-}^n, \mathbf{U}_{(k+\frac{1}{2})^+}^n \right) - \mathbf{F}_{k-\frac{1}{2}} \left(\mathbf{U}_{(k-\frac{1}{2})^-}^n, \mathbf{U}_{(k-\frac{1}{2})^+}^n \right) \right) + \frac{\Delta t}{h_k} S_k. \quad (\text{A13})$$

The HLL flux (Harten et al., 1983; Toro et al., 1994) is used as the numerical flux. It is given by

$$\mathbf{F}_{k+\frac{1}{2}}^{\text{HLL}} = \begin{cases} \mathbf{F}_L & \text{if } 0 < S_L \\ \frac{S_R \mathbf{F}_L - S_L \mathbf{F}_R + S_L S_R (U_R - U_L)}{S_R - S_L} & \text{if } S_L \leq 0 \leq S_R \\ \mathbf{F}_R & \text{if } 0 > S_R \end{cases} \quad (\text{A14})$$

15 The wave speed S_L and S_R are approximated as the smallest and largest eigenvalue at the corresponding node. To ensure the stability of this explicit scheme, a Courant–Friedrichs–Lewy (CFL) stability condition per cell is used for all eigenvalues λ_p at each

$$\mathbf{U}_k^n \left| \frac{\Delta t}{h_k} \lambda_p(\mathbf{U}_k^n) \right| \leq 1. \quad (\text{A15})$$

20

Appendix B

Coupled model

The finite element implementation of LSWE or LVBM uses linear polynomial for solving ϕ , ψ , and η . While the finite volume implementation for NSWE approximates h and u with a constant value. Since $u = \partial_x \phi$, the velocity of the two models are approximated with the same order of polynomials. By coupling both models, in simulation area we can rewrite Eq. (48) as

$$\mathbf{M}_{kl} \dot{\eta}_l - \mathbf{S}_{kl} \phi_l - \mathbf{B}_{kl} \psi_l - \delta_{k1} (hu)|_{x=B^-} = 0 \quad (\text{B1a})$$

$$\mathbf{M}_{kl} \dot{\phi}_k + g \mathbf{M}_{kl} \eta_k = 0 \quad (\text{B1b})$$

$$\mathbf{A}_{kl} \psi_l + \mathbf{B}_{kl} \phi_l + \mathbf{G}_{kl} \psi_l - \delta_{k1} \left(\frac{\tilde{\beta}}{h_b} hu \right) |_{x=B^-} = 0. \quad (\text{B1c})$$

In finite volume implementation, the boundary is inserted through the numerical flux at $x = B$ by using coupling condition (14) as follows

$$\begin{pmatrix} hu \\ h \end{pmatrix} = \begin{pmatrix} h_b \partial_x \check{\phi} + \check{\beta} \partial_x \check{\psi} \\ h_b + \check{\eta} \end{pmatrix}. \quad (\text{B2})$$

Acknowledgements. We are pleased to acknowledge funding for Wenny Kristina from The Netherlands Organization of Scientific Research (NWO), division Earth Sciences. The idea to couple potential flow (dispersive) models in a simulation area with the full NSWE in the onshore area came originally from the late Howell Peregrine and was used by Vijaya Ambati, Onno Bokhove, and Frank Klaver (Klaver, 2009).

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Horrillo, J., Kowalik, Z., and Shigihara, Y.: Wave Dispersion Study in the Indian Ocean-Tsunami of December 26, 2004, *Mar. Geod.*, 29, 149–166, 2006. 319, 345
- Klaver, F.: Coupling of numerical models for deep and shallow water, M.Sc. thesis, University of Twente, the Netherlands, 2009. 340, 351
- 5 Klopman, G., Van Groesen, E., and Dingemans, M.: A variational approach to Boussinesq modelling of fully non-linear water waves, *J. Fluid Mech.*, 657, 36–63, 2010. 322, 323
- Kristina, W., Van Groesen, E., and Bokhove, O.: Effective Coastal Boundary Conditions for Dispersive Tsunami Propagation, Memorandum 1983, Department of Applied Mathematics, University of Twente, Enschede, the Netherlands, 2012. 319, 320, 330, 339
- 10 Li, Y. and Raichlen, F.: Solitary wave run-up on plane slopes, *J. Waterw. Port C. Div.*, 127, 33–44, 2001. 320, 328, 330
- Liu, Y., Shi, Y., Yuen, D. A., Sevre, E. O. D., Yuan, X., and Xing, H. L.: Comparison of linear and nonlinear shallow wave water equations applied to tsunami waves over the China sea, *Acta Geotechnica*, 4, 129–137, 2009. 319
- 15 Luke, J. C.: A variational principle for fluids with a free surface, *J. Fluid Mech.*, 27, 395–397, 1967. 322
- Madsen, P. A. and Schaffer, H. A.: Analytical solutions for tsunami run-up on a plane beach: single waves, N-waves and transient waves, *J. Fluid Mech.*, 645, 27–57, 2010. 320, 328, 340
- Madsen, P. A., Murray, R., and Sorensen, O. R.: A new form of the Boussinesq equations with improved linear dispersion characteristics, *Coastal Eng.*, 15, 371–388, 1991. 319
- 20 Mei, C. C.: The applied dynamics of ocean surface waves, World Scientific Publishing Singapore, 1989. 321
- Miles, J. W.: On Hamilton's principle for surface waves, *J. Fluid Mech.*, 83, 153–158, 1977. 322
- Pelinovsky, E. N. and Mazova, R. Kh.: Exact Analytical Solutions of Nonlinear Problems of Tsunami Wave Run-up on Slopes with Different Profiles, *Nat. Hazards*, 6, 227–249, 1992. 328
- 25 Ryrie, S. C.: Longshore motion generated on beaches by obliquely incident bores, *J. Fluid Mech.*, 129, 193–212, 1983. 347
- Titov, V. V., Moore, C. W., Greenslade, D. J. M., Pattiaratchi, C., Badal, R., Synolakis, C. E., and Kanoglu, U.: A New Tool for Inundation Modeling: Community Modeling Interface for Tsunamis (ComMIT), *Pure Appl. Geophys.*, Topical Volume, 168, 2121–2131, 2011. 319
- 30 Toro, E. F., Spruce, M., and Speares, W.: Restoration of the contact surface in the HLL-Riemann solver, *Shock Waves*, 4, 25–34, 1994. 350

Synolakis, C. E.: The run-up of solitary waves, *J. Fluid Mech.*, 185, 523–545, 1987. 320, 328, 330, 341

Wei, Y., Bernard, E. N., Tang, L., Weiss, R., Titov, V. V., Moore, C., Spillane, M., Hopkins, M., and Kanoglu, U.: Real-time experimental forecast of the Peruvian tsunami of August 2007 for

5 U.S. coastlines, *Geophys. Res. Lett.*, 35, L04609, doi:10.1029/2007GL032250, 2008. 319

**EBC conditions for
tsunami wave run-up
over sloping
bathymetry**

W. Kristina et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

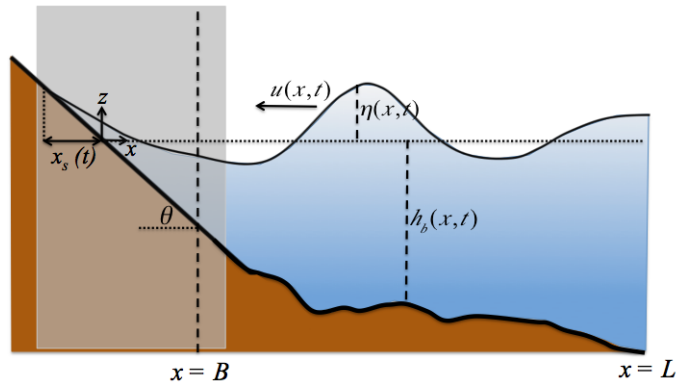


Fig. 1. At the seaward boundary $x = B$, we assign (η, u) -data, and we want to find a solution of the NSWE on the sloping region near the shoreline.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

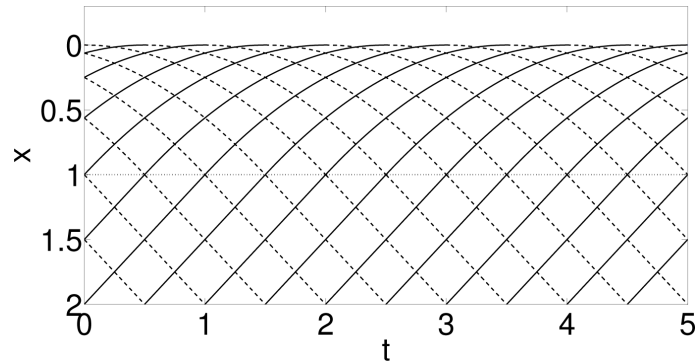


Fig. 2. Plot of the characteristic curves in case of no motion ($\eta = u = 0$) for the dimensionless NSWE over sloping bathymetry $b(x) = -x$ for $x \in [0, 1]$ and LSWE over flat bathymetry $h_0 = 1$, $B = 1$ for $x \in [1, 2]$. The “incoming” and “outgoing” characteristic curves are shown by solid and dashed lines, respectively. The shoreline $x = 0$ can be seen as the envelope of the characteristic curves themselves.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

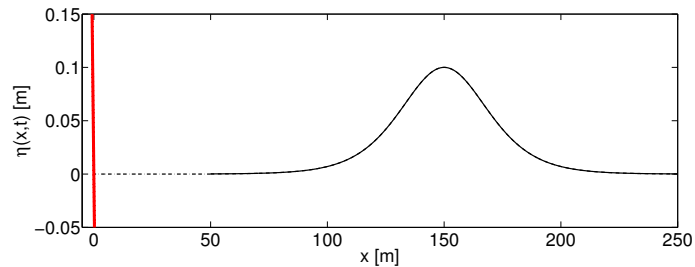


Fig. 3. The initial condition is shown for: the NSWE (dotted-dashed line) coupled to the linear model (dashed line), and the linear model with the EBC implementation (solid line).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

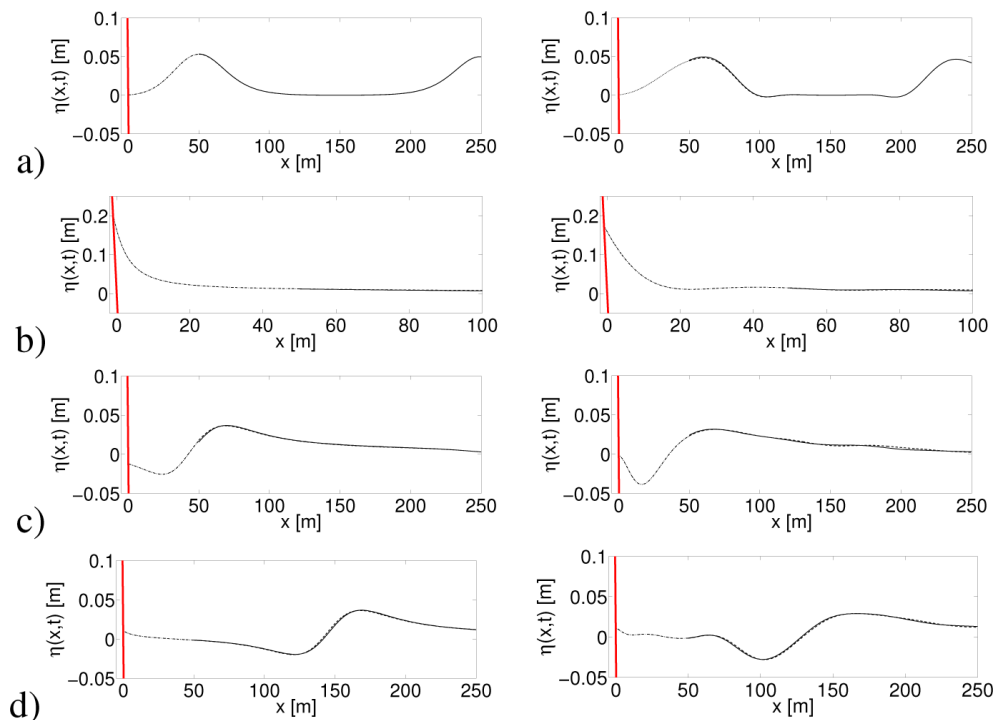


Fig. 4. Free-surface profiles are shown for the coupled linear model (left: LSWE, right: LVBM) with the NSWE (dashed and dotted-dashed lines), and for the linear model with an EBC implementation (solid line), at times **(a)** $t = 10$ s, **(b)** $t = 20$ s, **(c)** $t = 30$ s, **(d)** $t = 40$ s.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

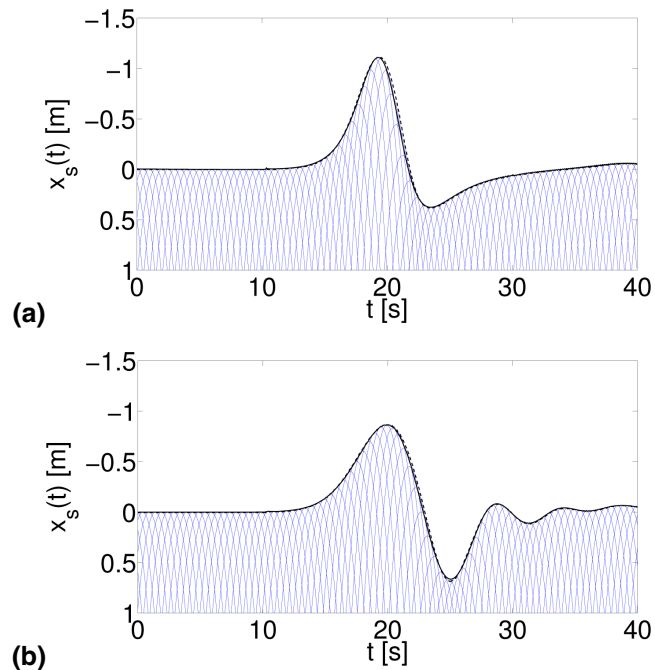


Fig. 5. The shoreline movement of the linear model (**a**: LSWE, **b**: LVBM) coupled to the NSWE is shown by the dashed line, while the solid one is the shoreline movement of the linear model simulation with an EBC implementation. Paths of the first-order characteristic curves are shown by the thin lines.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[⏪](#)
[⏩](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

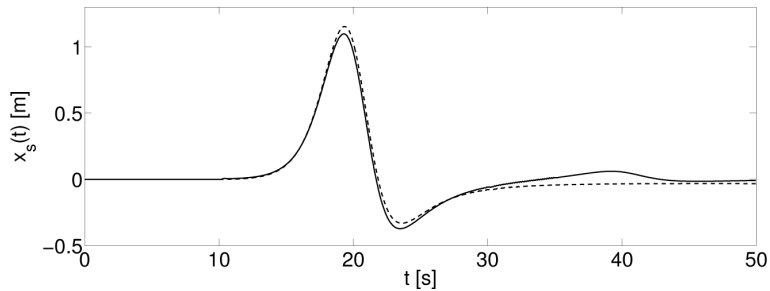


Fig. 6. Comparison of the shoreline movement of Choi et al. (2011) (dashed line) and LSW with EBC simulation (solid line) for solitary wave case.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[⏪](#)
[⏩](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

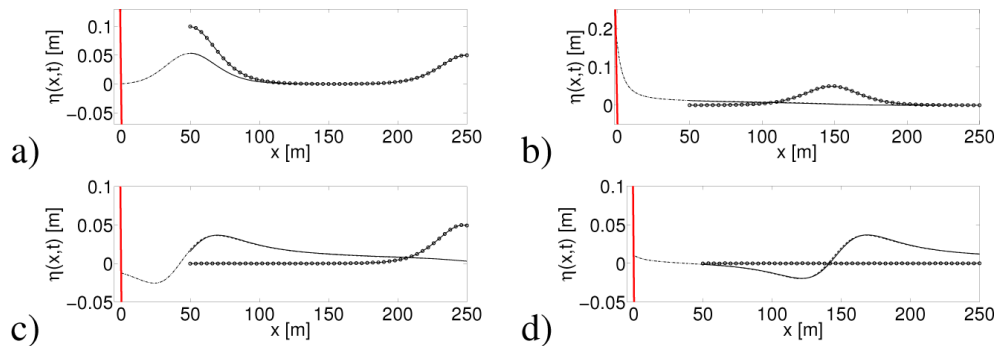


Fig. 7. Free-surface profiles are shown for the coupled LSWE with the NSWE (dashed and dotted-dashed lines), for the LSWE with an EBC implementation (solid line), and for the LSWE with Choi's method (solid line with "o" marker) at times **(a)** $t = 10$ s, **(b)** $t = 20$ s, **(c)** $t = 30$ s, **(d)** $t = 40$ s.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[⏪](#)
[⏩](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

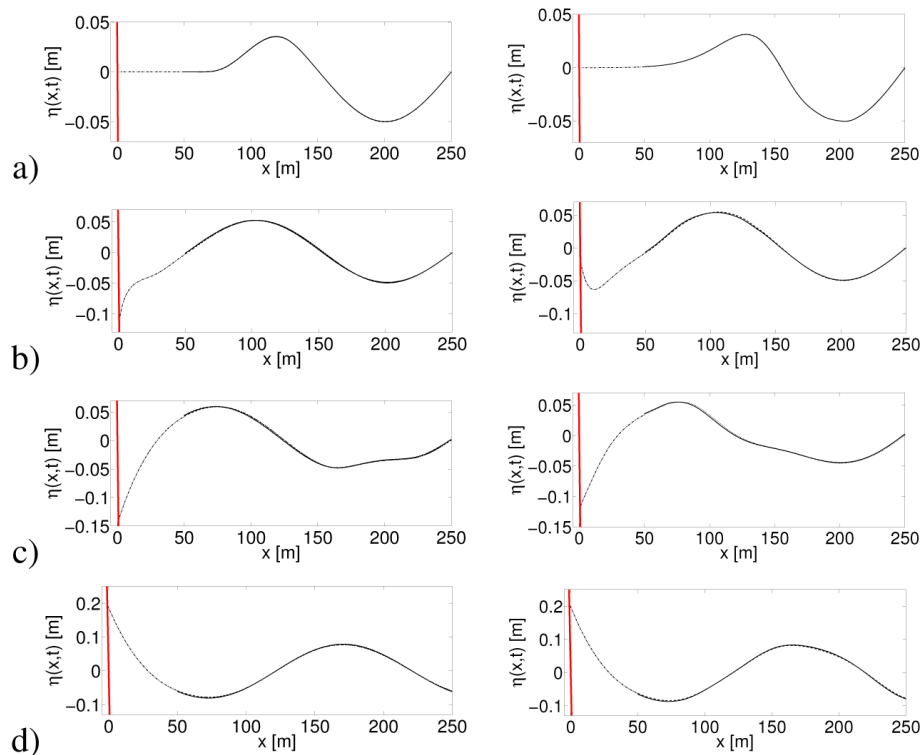


Fig. 8. Free-surface profiles are shown for the coupled linear model (left: LSWE, right: LVBM) with the NSWE (dashed and dotted-dashed lines), and for the linear model with an EBC implementation (solid line), at times **(a)** $t = 20$ s, **(b)** $t = 40$ s, **(c)** $t = 60$ s, **(d)** $t = 75$ s.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[⏪](#)
[⏩](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

**EBC conditions for
tsunami wave run-up
over sloping
bathymetry**

W. Kristina et al.

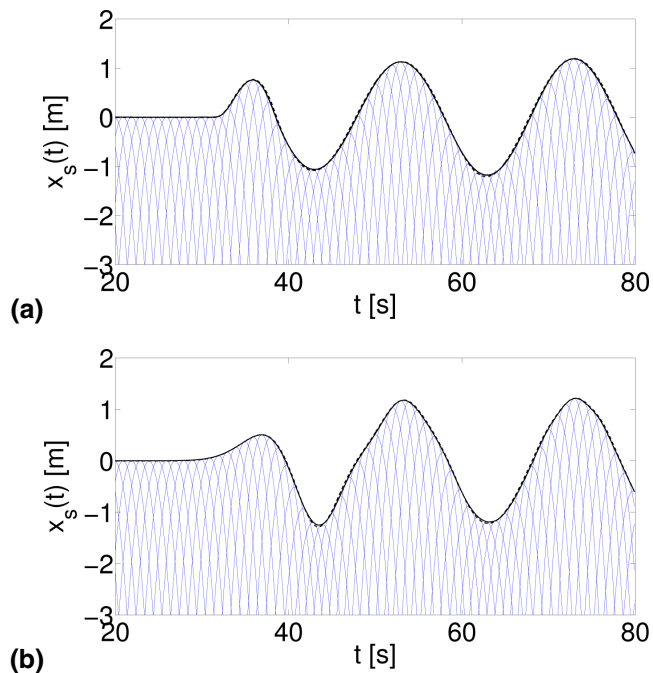


Fig. 9. The shoreline movement of the linear model (**a**: LSWE, **b**: LVBM) coupled to the NSWE is shown by the dashed line, while the solid one is the shoreline movement of the linear model simulation with an EBC implementation. Paths of the first-order characteristic curves are shown by the thin lines.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

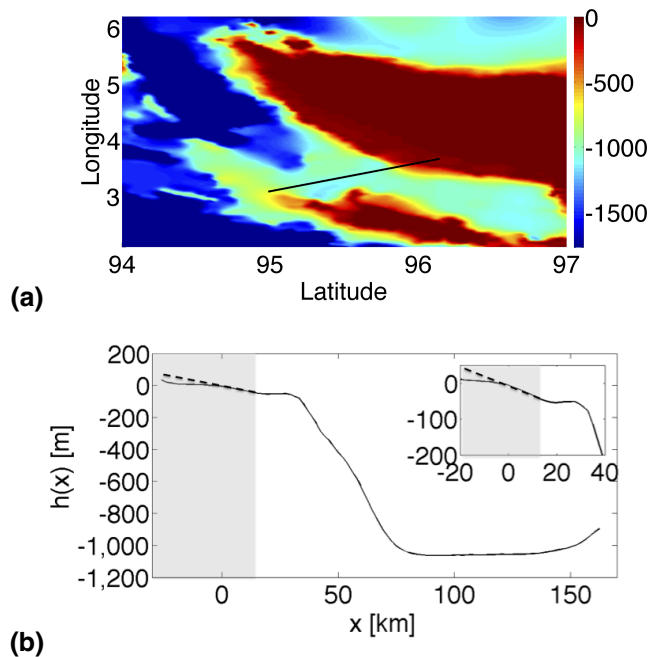


Fig. 10. Bathymetry near Aceh **(a)** and the cross section **(b)** at $(95.0278^\circ \text{ E}, 3.2335^\circ \text{ N})$ – $(96.6583^\circ \text{ E}, 3.6959^\circ \text{ N})$. The solid line concerns the bathymetry data and the dashed line concerns the approximation used in the simulations.

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

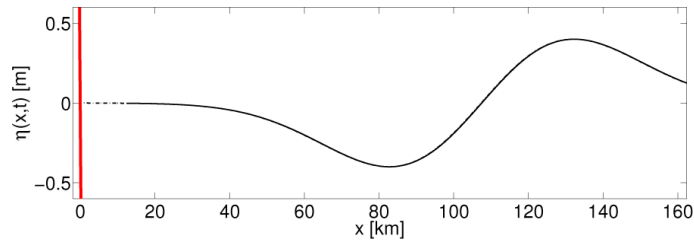


Fig. 11. The initial condition is shown for the linear model coupled to the NSWE (dashed and dotted-dashed lines) for the linear model with an EBC implementation (solid line).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

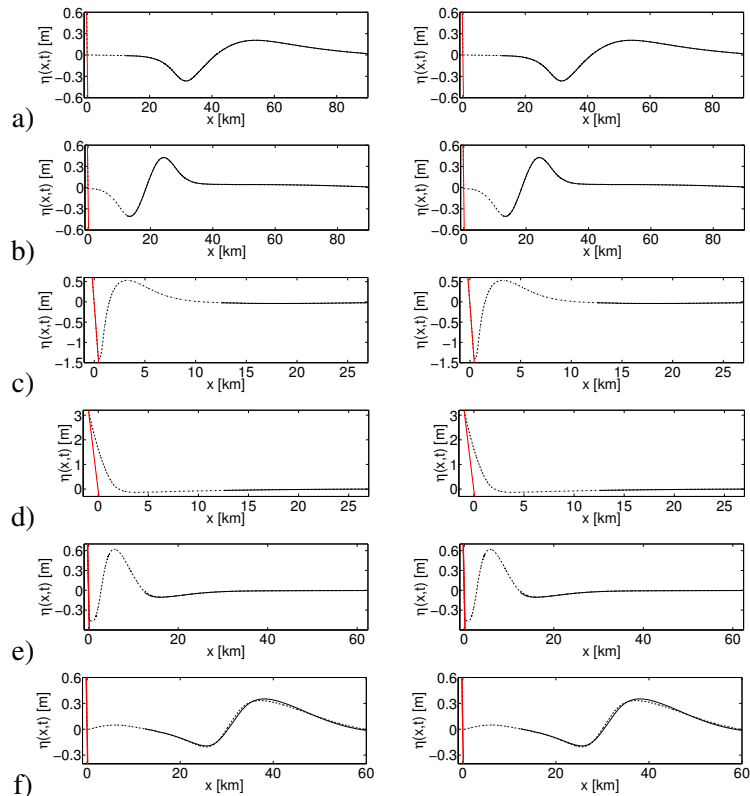


Fig. 12. Free-surface profiles of simulations with the linear model (left: LSWE, right: LVBM) coupled to the NSWE are shown by the dashed and dotted-dashed lines, and of simulation for a linear model with an EBC implementations are shown by the solid line at times **(a)** $t = 800$ s, **(b)** 1600 s, **(c)** 2700 s, **(d)** 3200 s, **(e)** 4000 s, **(f)** 5400 s.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[⏪](#)
[⏩](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

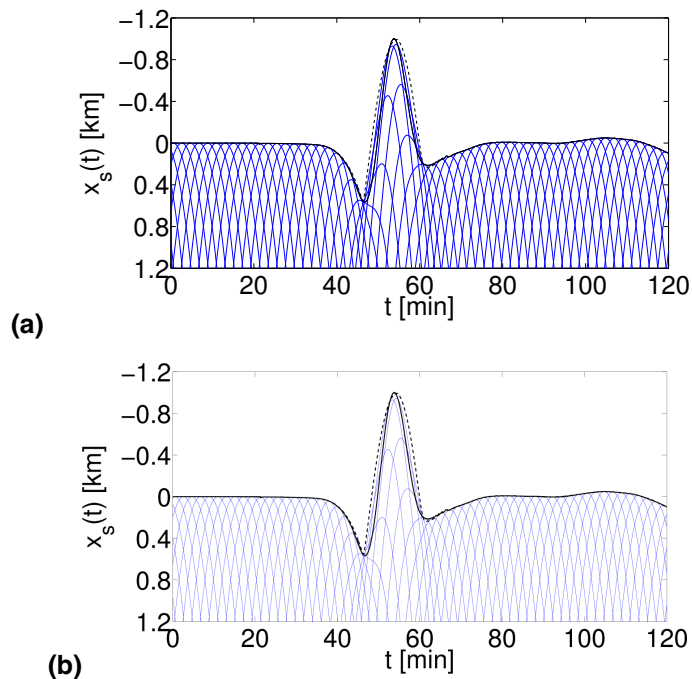


Fig. 13. Shoreline movement of the linear model (**a**: LSWE, **b**: LVBM) coupled to NSWE is shown by dashed line, while the solid one is the shoreline movement of linear model simulation with EBC implementation. Paths of the first order characteristic curves are shown by thin lines.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

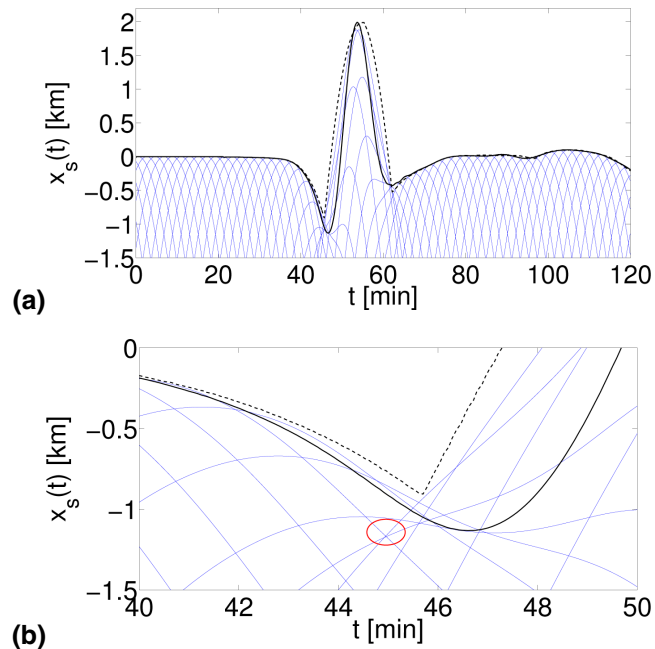


Fig. 14. Shoreline movement **(a)** and an inset **(b)** of a breaking wave simulation. The linear model coupled to NSWE is shown by dashed line, while the solid one is the shoreline movement of linear model simulation with EBC implementation. Paths of the first order characteristic curves are shown by thin lines.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[⏪](#)
[⏩](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

EBC conditions for tsunami wave run-up over sloping bathymetry

W. Kristina et al.

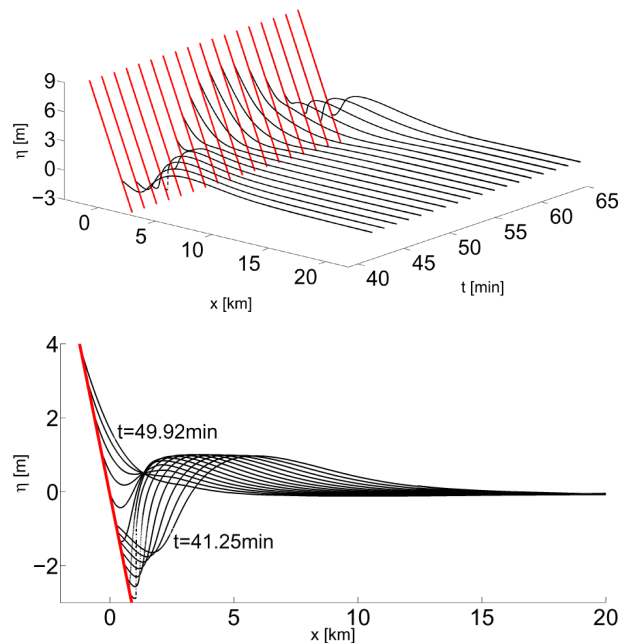


Fig. 15. Free-surface profiles of simulations with the linear model coupled to the NSWE are shown by the dashed and dotted-dashed lines, and of simulation for a linear model with an EBC implementations are shown by the solid line at $t = 40\text{--}70$ min.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion